

COPY.

69539.

SP. 189/35.

J. B. B.

From STEWARTS and LLOYDS, Limited, Coatbridge.

Messrs Blair & Co. Ltd. Order of 23rd July 1918. No. 5791.

1 - 3½" o/d Bent 5/16" thick.

1 - 3½" o/d Bent 5/16" thick.

1 - 3½" o/d Bent 5/16" thick.

Screwed at ends vanishing thread, not less than 11 threads per inch, and with stamped steel flanges screwed and expanded on, faced plain, turned on edge, caulked, but not drilled for bolts.



Lard. Steel Tubes.

Working pressure 180 lbs. per sq. inch.

Test pressure 540 lbs. per sq. inch.

To Lloyds tests, requirements, and inspection.

Steam Pipes for Standard Vessel Type "A" No. 1899.

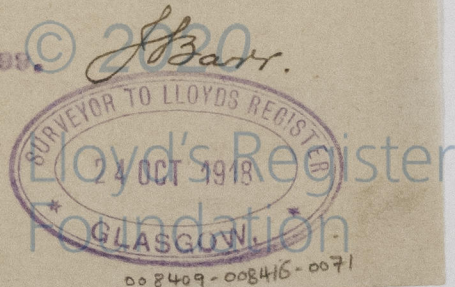

008409-008416-0071



Blair  
1899

COPY

COPY



© 2020

Lloyd's Register  
Foundation