

23 JUN 1945

Index No.

25071


Lloyd's Register of Shipping.

Ship's Name s.s. "GULFMAID"

Official No. 214827

Memorandum of alterations reported since ship was surveyed for assignment of Load Lines
in NEW ORLEANS, LOUISIANA.

A bulkhead, forming a cofferdam, has now been fitted 9 ft. aft of the forward bulkhead of No. 1 port and starboard summer tanks. Oval hatch coamings, 23 ins. x 16-1/2 ins. x 15 ins high with hinged steel covers fitted at the forward end of each cofferdam and 3 ins. air pipes, open ends 36 ins. above the deck with wire gauze diaphragms, fitted near the inboard sides of the hatch coamings.

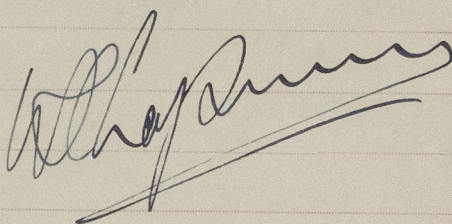

Noted
HST

23 JUN 1945



© 2020

Lloyd's Register
Foundation