

COPY.

653216

Lloyd's Register of Shipping.



Port GLASGOW.

July 8th, 1944.

This is to Certify that

T.P. GIBBESON

the undersigned Surveyor to this Society did at the request of

Messrs. Drysdale & Co. Ltd., attend at their Works at Yoker on the 25th April, 1944 and subsequent dates for the purpose of examining and testing One 7" Rotary Centrex Patent Stand-by and General Service Pump manufactured by them under Job No. D.3266 to the order of Messrs. Henry Robb Ltd., Leith, and intended for their J.11827.

The pump which was driven by an electric motor was examined under working conditions and the following results were obtained :-

R.P.M.	Volts	Amps	B.H.P. Motor Effy. 88.5%	Galls per Min.	Total Head in ft.	Despatch Number	Motor Maker & No.	Starter Maker and No.
1745	218	140	36.7	294	169	58613	W.H.A.	W.H.A.
1100	220	67	17.5	860	30.5		E2/44317/2	E2/44318/2

The pump casing was tested under hydraulic pressure to 120 lbs. per square inch; the separator was also tested under hydraulic pressure to 120 lbs. per square inch. The air pump casing was tested to 30 lbs. per square inch and all were found sound and tight.

For purposes of identification the unit was stamped:-

LLOYD'S NO. 53216
2. 7. 44. T.P.G.

T.P. Gibbeson


SURVEYOR TO LLOYD'S REGISTER.

FEE: £2. 2. 0.

ht

This Certificate is issued upon the terms of the Rules and Regulations of the Society, which provide that:-

"While the Committees of the Society use their best endeavours to ensure that the functions of the Society are properly executed, it is to be understood that neither the Society nor any Member of any of its Committees is under any circumstances whatever to be held responsible for any inaccuracy in any report or certificate issued by the Society or its Surveyors, or in any entry in the Register Book or other publication of the Society, or for any error of judgment, default or negligence of any of its Committees or any Member thereof, or the Surveyors, or other Officers or Agents of the Society."

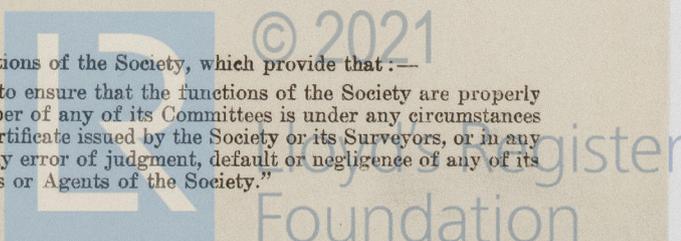

010466-010477 0293