

as m...

Rpt. 13.

No. 30644

REPORT ON ELECTRIC FITTINGS.

(OTHER THAN FOR THE PROPULSION OF THE VESSEL)

Received at London Office..... 4 JUN 1931

Date of writing Report 19 .. When handed in at Local Office 3 JUNE 1931 Port of SUNDERLAND

No. in Survey held at SUNDERLAND Date, First Survey May 13 Last Survey May 20 1931
 Reg. Book. (Number of Visits..... 3.....)

91548 on the SS. MOYRA. Tons { Gross 1396
 Net 459

Built at SUNDERLAND By whom built SWAN HUNTER & W.R. LTD Yard No. 1467 When built 1931

Owners MOIRA SHIPPING CO LTD. Port belonging to NEWCASTLE.

Electric Light Installation fitted by SWAN HUNTER & W.R. LTD Contract No. 1467 When fitted 1931

Is the Vessel fitted for carrying Petroleum in bulk No

System of Distribution Double Wire

Pressure of supply for Lighting 110 volts, Heating - volts, Power - volts.

Direct or Alternating Current, Lighting Direct Power -

If alternating current system, state frequency of periods per second -

Has the Automatic Governor been tested and found efficient when the whole load is suddenly thrown on or off Yes

Generators, do they comply with the requirements regarding rating Yes, are they compound wound Yes
 are they over compounded 5 per cent. Yes, if not compound wound state distance between each generator -

Where more than one generator is fitted are they arranged to run in parallel -, is an adjustable regulating resistance fitted in series with each shunt field Yes

Are all terminals accessible, clearly marked, and furnished with sockets Yes, are they so spaced or shielded that they cannot be accidentally earthed, short circuited, or touched Yes Are the lubricating arrangements of the generators as per Rule Yes

Position of Generators Engine Room Starboard Side
 is the ventilation in way of the generators satisfactory Yes, are they clear of all inflammable material Yes

if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the generators - and -, are the generators protected from mechanical injury and damage from water, steam or oil Yes

are their axes of rotation fore and aft Yes

Earthing, are the bedplates and frames of the generating plant efficiently earthed Yes are the prime movers and their respective generators in metallic contact Yes

Main Switch Boards, where placed Engine Room Starboard Side

If the generators and main switchboard are not placed in the same compartment, is each generator provided with a fuse on each insulated pole as near as possible to the terminals of the generator, additional to that provided on the main switchboard -

Switchboards, are they placed in accessible positions, free from inflammable gases and acid fumes Yes
 are they protected from mechanical injury and damage from water, steam or oil Yes, if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the switchboards 12" horizontally and -

are they constructed wholly of durable, non-ignitable non-absorbent materials Yes, is all insulation of high dielectric strength and of permanently high insulation resistance Yes, if semi-insulating material is used, are all conducting parts insulated from the slab with mica or micaite or other non-hygroscopic insulating material, and the slab similarly insulated from its framework -

and is the frame effectively earthed Yes Are the fittings as per Rule regarding:— spacing or shielding of live parts Yes

accessibility of all parts Yes, absence of fuses on back of board Yes, proportion of omnibus bars Yes, individual fuses to voltmeter, pilot or earth lamp Yes, connections of switches Yes

Main Switchgear, description of switchgear for each generator and each outgoing circuit, and arrangement of equalizer switches Double Pole


Switch and fuse for Dynamo. Single Pole switches and Double Pole fuses for outgoing circuits

Instruments on main switchboard 1 ammeters 1 voltmeters - synchronising device for paralleling purposes.

Earth Testing, state what means are provided at the main switchboard for indicating the state of the insulation of the system Earth lamps connected to earth through switches and fuses

Switches, Circuit Breakers and Fusible Cut-outs, do these comply with the requirements of the Rules Yes

Joint Boxes Section and Distribution Boards, is the construction, protection, insulation, material, and position of these as per rule Yes

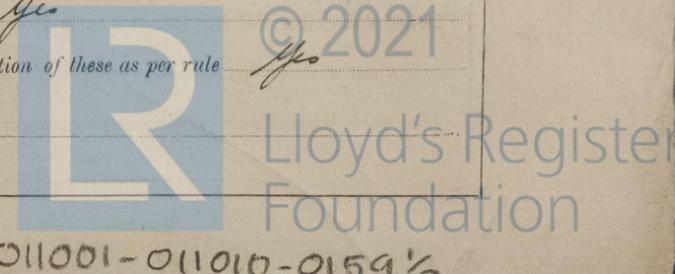

Cables: Single, twin, concentric, or multicore Single are the cables insulated and protected as per Tables IV or V of the Rules Yes

Fall of Pressure, state maximum between bus bars and any point of the installation under maximum load 3.5 volts

Cable Sockets and other connections, are the ends of all cables having a sectional area of 0.04 square inch and above provided with soldering sockets Yes

Paper Insulated Cables. If cables are paper covered, is the dielectric at the exposed ends of the conductor protected from moisture by being suitably sealed with insulating compound —

Cable Runs, are the cables fixed as far as possible in accessible positions not exposed to drip or accumulation of water or oil, or to high temperature from boilers, steam pipes, uptakes or other hot objects, or to avoidable risk of mechanical damage Yes

Support and Protection of Cables, state how the cables are supported and protected Lead covered & armoured in machinery chases & trough holds clipped up with galvanized iron clips. Lead covered supported with brass clips in accommodation
If cables are run in wood casings, are the casings and caps secured by screws —, are the cap screws of brass —, are the cables run in separate grooves —. If armoured and lead covered cables are secured by metal clips, are the clips spaced as per Table VIII Yes

Refrigerated Chambers, if lights are fitted, are the cables and fittings in accordance with the special requirements —

Joints in Cables, state if any, and how made, insulated, and protected —

Watertight Glands and Deck Tubes, are all cables passing through decks and watertight bulkheads provided with deck tubes or watertight glands Yes

Bushes in Beams and Non-watertight Partitions, where unarmoured cables pass through beams and non-watertight partitions, are the holes efficiently bushed Yes state the material of which the bushes are made Rubber & lead

Earthing Connections, state what earthing connections are fitted and their respective sectional areas —

Alternative Lighting, are the groups of lights in the propelling machinery space arranged as per Rule Yes

Emergency Supply, state position and method of control of the emergency supply and how the generator is driven —

Navigation Lamps, are these separately wired Yes, controlled by separate switch and separate fuses Yes, are the fuses double pole Yes, are the switches and fuses grouped in a position accessible only to the officers on watch Yes, has each navigation lamp an automatic indicator as per Rule Yes

Secondary Batteries, are they constructed and fitted as per Rule —

Fittings, are all fittings on weather decks, in stokeholds and engine rooms and wherever exposed to drip or condensed moisture, watertight Yes, are any fittings placed in spaces in which goods are liable to be stacked in close proximity to them; if so, how are they protected —, are any fittings placed in spaces where inflammable or explosive dust or gases are liable to be present, if so, how are they protected —, how are the cables led —, where are the controlling switches situated —

Flood Light Searchlight Lamps, No. of 1, whether fixed or portable Portable, are their fittings as per Rule Yes

Arc Lamps, other than searchlight lamps, No. of —, are their live parts insulated from the frame or case —, are their fittings as per Rule —

Motors, are their working parts readily accessible —, are the coils self-contained and readily removable for replacement —, are the brushes, brush holders, terminals and lubricating arrangements as per Rule —, are the motors placed in well-ventilated compartments in which inflammable gases cannot accumulate and clear of all inflammable material —, are they protected from mechanical injury and damage from water, steam or oil — are their axes of rotation fore and aft —, if situated near unprotected woodwork or other combustible material, are the motors of the totally enclosed, pipe ventilated, forced draught, drip or flame proof type —, if not of this type, state distance of the combustible material horizontally or vertically above the motors — and —

Control Gear and Resistances, are the generator field and motor speed regulators, starters and controllers constructed and fitted as per Rule Yes

Lightning Conductors, where lightning conductors are required, are these fitted as per Rule Yes

Ships carrying Oil having a Flash Point less than 150° F. Have the special requirements of the Rules been complied with regarding switches, joint boxes, section and distribution boards, protection of cables, method of distribution, lead of cables, lights and fittings —, If portable lamps for use in dangerous spaces are supplied, are they of a type approved by the Home Office —

PARTICULARS OF GENERATING PLANT.

DESCRIPTION OF GENERATOR.	No. of	RATED AT				DRIVEN BY	WHERE DRIVEN BY AN INTERNAL COMBUSTION ENGINE.	
		Kilowatts.	Volts.	Amps.	Revs. per Min.		Fuel Used.	Flash Point of Fuel.
MAIN	1	5 1/2	110	50	430	P.C. Steam Engine		
AUXILIARY								
EMERGENCY								
ROTARY TRANSFORMER								

GENERATOR, LIGHTING AND HEATING CONDUCTORS.

DESCRIPTION.	CONDUCTORS.		COMPOSITION OF STRAND.		TOTAL MAXIMUM CURRENT, AMPERES.		Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
	No. per Pole.	Total Effective Area per Pole Sq. Ins.	No.	Diameter.	In Circuit.	Rule.			
MAIN GENERATOR	1	.04	19	.052	50	64	20	V.I.R.	L.C. & A.
EQUALISER CONNECTIONS									
AUXILIARY GENERATOR									
EMERGENCY GENERATOR									
ROTARY TRANSFORMER MOTOR GENERATOR	1	.0045	7	.029	8	18.2	6	do	do
ENGINE ROOM									
BOILER ROOM									
AUXILIARY SWITCHBOARDS									
ACCOMMODATION Aft	1	.007	7	.036	20	24	48	do	do
do Forward	1	.0045	7	.029	13	18.2	116	do	do
NAVIGATION	1	.0045	7	.029	9	18.2	150	do	do
WIRELESS									
FLOODLIGHT SEARCHLIGHT	1	.001	3	.029	4.5	7.8	12	do	L.C.
MASTHEAD LIGHT	1	.002	3	.029	36	7.8	266	do	L.C. & A.
SIDE LIGHTS	1	.002	3	.029	36	7.8	40	do	L.C.
COMPASS LIGHTS	1	.002	3	.029	1	7.8	12	do	do
STEAM ROOF LIGHTS	1	.002	3	.029	36	7.8	340	do	L.C. & A.
CARGO LIGHTS									
ARC LAMPS									
HEATERS									

MOTOR CONDUCTORS.

DESCRIPTION.	No. of Motors.	CONDUCTORS.		COMPOSITION OF STRAND.		TOTAL MAXIMUM CURRENT, AMPERES.		Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
		No. Per Pole.	Total Effective Area per Pole Sq. Ins.	No.	Diameter.	In Circuit.	Rule.			
BALLAST PUMP										
MAIN BILGE LINE PUMPS										
GENERAL SERVICE PUMP										
EMERGENCY BILGE PUMP										
SANITARY PUMP										
CIRC. SEA WATER PUMPS										
CIRC. FRESH WATER PUMPS										
AIR COMPRESSOR										
FRESH WATER PUMP										
ENGINE TURNING GEAR										
ENGINE REVERSING GEAR										
LUBRICATING OIL PUMPS										
OIL FUEL TRANSFER PUMP										
WINDLASS										
WINCHES, FORWARD										
WINCHES, AFT										
STEERING GEAR										
(a) MOTOR GENERATOR										
(b) MAIN MOTOR										
WORKSHOP MOTOR										
VENTILATING FANS										

All Conductors are of annealed copper conforming to British Standard Specification No. 7.
 The Insulated Conductors are guaranteed to withstand the immersion and resistance tests specified in the Rules.
 The foregoing is a correct description.

FOR
SWAN, HONTER. & WIGHAM RICHARDSON. LTD
W. Honter

Electrical Engineers.

Date *27th May 1931.*

COMPASSES.

Distance between electric generators or motors and standard compass *65 ft.*

Distance between electric generators or motors and steering compass *57 ft.*

The nearest cables to the compasses are as follows:—

A cable carrying *1* Ampères *in* feet from standard compass *8* feet from steering compass.

A cable carrying *1* Ampères *8* feet from standard compass *in* feet from steering compass.

A cable carrying *9* Ampères *10* feet from standard compass *6* feet from steering compass.

Have the compasses been adjusted with and without the electric installation at work at full power *Yes.*

Has the effect of switching on and off circuits, motors and other electro-magnetic apparatus within the vicinity of the compasses been noted *Yes.*

The maximum deviation due to electric currents was found to be *nil* degrees on *any* course in the case of the standard compass, and *nil* degrees on *any* course in the case of the steering compass.

FOR
SWAN, HONTER & WIGHAM RICHARDSON LTD.
Maxwell Ballantyne
 GENERAL MANAGER

Builder's Signature.

Date *28-5-31*

Is this installation a duplicate of a previous case *No.* If so, state name of vessel

General Remarks (State quality of workmanship, opinions as to class, &c. *This installation has been fitted on board under special survey and has been tested under full working conditions and found satisfactory. The materials and workmanship were found to be good and sound.*)

It is submitted that
 this vessel is eligible for
 THE RECORD.
elec light
20/5/31

Total Capacity of Generators *5 1/2* Kilowatts.

The amount of Fee ... £ *6* : - : { When applied for, *18 May 31*

Travelling Expenses (if any) £ : : { When received, *20.5.31*

R.C. Clayton
 Surveyor to Lloyd's Register of Shipping.

Committee's Minute

Assigned

elec Lt

1m.0.0.0.—Transfer. (The Surveys are requested not to write on or below the space for Committee's Minute.)



© 2021

Lloyd's Register Foundation