

Rpt. 8

REPORT OF SHIP SURVEYS AND REPAIRS

Received London

503/NDP/8

Ship's Name SS/MS "ZURRIOLA"

Gross tons 2078

Is there a rpt. 9? Yes

Port BARCELONA

Rpt. No. 7982

No. of visits 2

First date 11-4-64

Last date 14-4-64

Interim Cert. issued & copy herewith? Yes

Damage rpt. issued & copy herewith?

Last rpt. (H.Q. only) BCL 7773

Date of completing rpt. 20-5-64

Surveyed at, if different from Port above

Surveyed afloat and/or in D.D. Drydock

Last date of examination in D.D. 14-4-64

Has a Load Line Survey been held?

Freeboard Marks verified

State which additional Rpt. 8 is attached: (Cont); (PS); (DR); (EQ); (Rig)

Survey fees

Damage fee

Expenses

DS. 875,-

80,-

Drilling 800,-

S.A. fee

12 JUN 1964

21 5120-950110-7H0110

I have surveyed the above ship in accordance with the Rules for DRYDOCKING

Drydocking carried out in accordance with report 8 (PS) attached.

The items now surveyed are detailed on this report. All were found or placed in good condition unless otherwise stated.

When carrying out the dry dock survey it was observed that the main deck plates were in general wavy, and when hammer tested sounded thin.

It was recommended all main deck plates be drill tested, as the result of which it was found that approximately 80% of the deck plates were below minimum thickness and in some cases 2.1 mm. 3 mm. and 3.1 mm. etc.

It was recommended that all main deck plates at or below minimum thickness be renewed.

The Owners have now stopped all work on the vessel pending a decision to sell the vessel for breaking up.

It is recommended that the class of this vessel be suspended until the main deck is repaired.

We recommend that this ship remain as classed with/without fresh record of dry docking the class of this vessel be suspended until the main deck is repaired.

(Where conditions of class are recommended to be retained, imposed, amended or deleted, particulars must be stated above and on the interim certificate.)

Surveyor to Lloyd's Register of Shipping

Date of Committee FRIDAY - 3 JUL 1964 R. W. Stonehouse & J. Alday

GENERAL COMMITTEE Minute

30th July '64. Class will remain suspended until decision confirmed.

Class will remain suspended until decision confirmed.

ALSO FOR

SPL FOR

TRO

SRL

POSTING

HEADER

CERT

When taken or recommended should be described fully under "defects & repairs". When any part has been subjected to pressure test this should be stated.

Where repairs have been effected or it is considered that re-examination or repairs should be made before that date the circumstances and date of the next Special Survey.

The condition of any item is to be described as "good" only when it has been examined, found or placed in good condition and is considered to be acceptable until the due date of the next Special Survey.

Ship's Name SS ~~AMS~~ "ZURRIOLA"

S.S. () Due

Port Barcelona


Rpt. No. 7982

	<u>Examined & condition</u>	<u>Examined & condition</u>
In dry dock from	11-4-64	* Air & sounding pipes (above deck) Good
.. .. . to	26-4-64	Doublers under Not examined
Shell plating	Good	Steering arrangements (main) Good
Sternframe	Good (aux) Good
Rudder	Good	Windlass Good
Was rudder lifted?	No	Masts & rigging (from deck) Good
Plating, etc. in way of shell openings	Good	Hand pumps & suction Not examined
Side scuttles & deadlights	Not	W.T. doors Not examined
Overbd. scuppers & discharges	Good	Bulwarks, freeing ports, etc. Good
F.P. spaces	Not examined	Summer freeboard as verified -
Chain locker	Not examined	
A.P. spaces	Not examined	
Engine space	Not examined	
Boiler space	Not examined	
Under E. & B.	Not examined	
Coal bunker	Not examined	
Tunnel & well	Not examined	
Cement, asphalt, etc., on btm. shell	Not examined	
Weather decks	Very wasted +	
* Casings	Good	
* Deckhouses	Good	
* Superstructures	Good	
* Skylights	Good	
* Companionways	Good	
* Hatchways	Good	
* Ventilators	Good	
Other items:		

EQUIPMENT:

Equipment letter "r"
 Fee ltr., if diff. from eqpt. ltr. -
 Anchors: No. on board 3 Bowers
 State if ranged Not ranged
 Length on board Stated, complete
 Mean dias. range from - to -
 Rule length 440 mts. Dia. 44.5 mm.
 Mooring ropes Sufficient.

* These items to include their closing appliances
 Where a part Special Survey and, say, Dry Docking Survey are held at the same time, the items for SS should be marked "For SS"

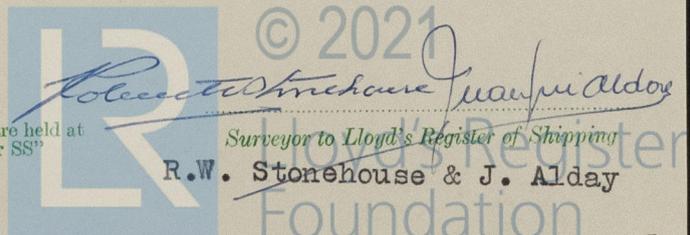

011047 01056-0215 2/2