

Rpt. 13.

No. 32495

REPORT ON ELECTRICAL EQUIPMENT.

(OTHER THAN FOR THE PROPULSION OF THE VESSEL)

Date of writing Report 14 Oct., 1938 When handed in at Local Office 7 OCT. 1938 Received at London Office OCT 8 1938

No. in Survey held at Sunderland and Newcastle Date, First Survey 16/8/1938 Last Survey 29/9/1938
Reg. Book. Suppt. 89078 on the S.S. "MASTER ELIAS KULUKUNDIS" (Number of Visits.....)

Built at Sunderland By whom built Shott Bros. Ltd. Yard No. 456 When built 1938
Tons { Gross 5548
Net 3234

Owners Atlantic Steamship Co. Ltd. Port belonging to Piraeus

Electric Light Installation fitted by Campbell & Sherwood, Ltd. Contract No. 456 When fitted 1938

Is the Vessel fitted for carrying Petroleum in bulk no

System of Distribution Double wire

Pressure of supply for Lighting 110 volts, Heating — volts, Power 110 volts.

Direct or Alternating Current, Lighting Direct Power Direct

If alternating current system, state frequency of periods per second —

Has the Automatic Governor been tested and found efficient when the whole load is suddenly thrown on or off Yes

Generators, do they comply with the requirements regarding temperature rise Yes, are they compound wound Yes
are they over compounded 5 per cent. Yes, if not compound wound state distance between each generator —

Where more than one generator is fitted are they arranged to run in parallel no, is an adjustable regulating resistance fitted in series with each shunt field Yes. Have certificates of test results for machines under 100 kw. been submitted and approved Yes, certs. heworth

Have machines over 100 kw. been inspected by the Surveyors during manufacture and testing None fitted

Have certificates for generators under 100 kw. been supplied and approved Manufacturers' test certs. only supplied

Are all terminals accessible, clearly marked, and furnished with sockets Yes, are they so spaced or shielded that they cannot be accidentally earthed, short circuited, or touched Yes

Are the lubricating arrangements of the generators as per Rule Yes

Position of Generators Main: Engine Room starboard. Auxiliary: Engine Room port. is the ventilation in way of the generators satisfactory Yes are they clear of all inflammable material Yes if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the generators — and —

are the generators protected from mechanical injury and damage from water, steam or oil Yes, are their axes of rotation fore and aft Yes

Earthing, are the bedplates and frames of the generating plant efficiently earthed Yes are the prime movers and their respective generators in metallic contact Yes Main Switch Boards, where placed Engine room starboard side

If the generators and main switchboard are not placed in the same compartment, is each generator provided with a fuse on each insulated pole as near as possible to the terminals of the generator, additional to that provided on the main switchboard —

Switchboards, are they placed in accessible positions, free from inflammable gases and acid fumes Yes, are they protected from mechanical injury and damage from water, steam or oil Yes, if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the switchboards — and —, are they constructed wholly of durable, non-ignitable non-absorbent materials Yes


is all insulation of high dielectric strength and of permanently high insulation resistance Yes, is it of an approved type Yes, if semi-insulating material is used, are all conducting parts insulated from the slab with mica or micanite or other non-hygroscopic insulating material, and the slab similarly insulated from its framework —, is the non-hygroscopic insulating material of an approved type —, and is the frame effectively earthed Yes

Are the fittings as per Rule regarding:— spacing or shielding of live parts Yes, accessibility of all parts Yes, absence of fuses on back of board Yes, temperature rise of omnibus bars Yes, individual fuses to voltmeter, pilot or earth lamp Yes, are moving parts of switches alive in the "off" position no are all screws and nuts securing connections effectively locked Yes are any fuses fitted on the live side of switches no

Main Switchgear, description of switchgear for each generator and each outgoing circuit, and arrangement of equalizer switches D.P. sw. & D.P. fuses on generator mains; S.P. C.O. sw. & D.P. fuses on outgoing circuits

Are turbine driven generators fitted with emergency trip switch as per rule — Are cupboards or compartments containing switchboards composed of fire-resisting material or lined with approved material — Instruments on main switchboard Two ammeters Two voltmeters — synchronising device for paralleling purposes. For compound machines is the ammeter connected on the opposite pole to equaliser connection —

Earth Testing, state what means are provided at the main switchboard for indicating the state of the insulation of the system E lamps coupled to E through fuses only. Switches, Circuit Breakers and Fusible Cut-outs, do these comply with the requirements of the Rules Yes are the fusible cutouts of an approved type Yes have the reversed —

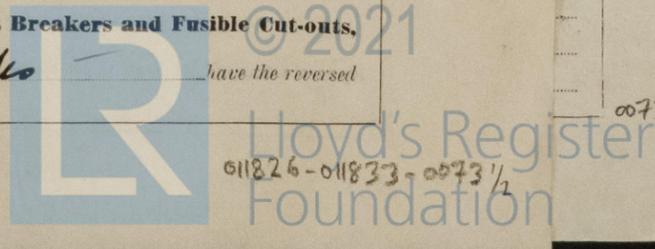

current protection devices been tested under working conditions — are all fuses labelled as per rule *Yes*

Joint Boxes, Section and Distribution Boards, is the construction, protection, insulation, material, and position of these as per rule *Yes*

Cables; Single, twin, concentric, or multicore *Single* are the cables insulated and protected as per Tables IV, V, X, XI, XII or XIII of the Rules *Yes*

If the cables are insulated otherwise than as per Rule, are they of an approved type — Fall of Pressure, state maximum between bus bars and

any point of the installation under maximum load *Less than 5.3 volts* Cable Sockets, are the ends of all cables having a sectional

area of 0.04 square inch and above provided with soldering sockets *Yes* Paper Insulated and Varnished Cambric Insulated Cables,

If conductors are paper or varnished cambric insulated, is the dielectric at the exposed ends of the conductor protected from moisture by being suitably sealed with

insulating compound —, or waterproof insulating tape — Cable Runs, are the cables fixed as far as possible in accessible positions

not exposed to drip or accumulation of water or oil, or to high temperature from boilers, steam pipes, uptakes or other hot objects, or to avoidable risk of mechanical

damage *Yes* are cables laid under machines or floorplates *No* if so, are they adequately protected —

Are cables in machinery spaces, galleys, laundries, bathrooms and lavatories lead covered or run in conduit *Yes*

Support and Protection of Cables, state how the cables are supported and protected *V.I.R. cables run in heavy gauge covered*

If cables are run in wood casings, are the casings and caps secured by screws —, are the cap screws of brass —, are the cables run in

separate grooves — If armoured and lead covered cables are secured by metal clips, are the clips spaced as per Table VIII *Yes*

Refrigerated Chambers, are the cables and fittings in accordance with the special requirements —

Joints in Cables, state if any, and how made, insulated, and protected *Home made*

Watertight Glands and Deck Tubes, are all cables passing through decks and watertight bulkheads provided with deck tubes or watertight glands

Yes Bushes in Beams and Non-watertight Partitions, where unarmoured cables pass through beams and non-watertight partitions, are the

holes efficiently bushed *Yes* state the material of which the bushes are made *Lead*

Earthing Connections, state what earthing connections are fitted and their respective sectional areas —

are their connections made as per Rule *Yes*

Alternative Lighting, are the groups of lights in the propelling machinery space arranged as per Rule *Yes* Emergency Supply, state

position and method of control of the emergency supply and how the generator is driven —

Navigation Lamps, are these separately wired *Yes*, controlled by separate switch and separate fuses *Yes*, are the fuses double pole *Yes*

are the switches and fuses grouped in a position accessible only to the officers on watch *Yes*

has each navigation lamp an automatic indicator as per Rule *Yes* Secondary Batteries, are they constructed and fitted as per Rule —

are they ventilated as per Rule —

Fittings, are all fittings on weather decks, in stokeholds and engine rooms and wherever exposed to drip or condensed moisture, watertight *Yes*

are any fittings placed in spaces in which goods are liable to be stacked in close proximity to them; if so, how are they protected —

are any fittings placed in spaces where inflammable or explosive dust or gases are liable to be present, if so, how are they protected —

—, how are the cables led

—

where are the controlling switches situated —

are all fittings suitably ventilated *Yes*, are all switches and lampholders constructed wholly of non-ignitable, non-absorbent materials *Yes*

Heating and Cooking Appliances, are they constructed and fitted as per Rule —, are air heaters constructed and fitted as per Rule —

Searchlight Lamps, No. of *Home fitted* whether fixed or portable —, are their fittings as per Rule —

Motors, are their working parts readily accessible *Yes*, are the coils self-contained and readily removable for replacement *Yes*

are the brushes, brush holders, terminals and lubricating arrangements as per Rule *Yes*, are the motors placed in well-ventilated compartments in which

inflammable gases cannot accumulate and clear of all inflammable material *Yes*, are they protected from mechanical injury and damage from

water, steam or oil *Yes* are their axes of rotation fore and aft *Yes*, if situated near unprotected woodwork or other combustible

material, are the motors of the totally enclosed, pipe ventilated, forced draught, drip or flame proof type —

—, if not of this type, state distance of the combustible material horizontally or vertically above the motors — and —

have machines of over 100 BHP been inspected by the Surveyors during manufacture and testing *Home fitted* have certificates for all motors for

essential services been supplied and approved *As such motors fitted* Control Gear and Resistances, are the generator field and motor speed

regulators, starters and controllers constructed and fitted as per Rule *Yes* Lightning Conductors, where lightning conductors

are required, are these fitted as per Rule — Ships carrying Oil having a Flash Point less than 150° F. Have the special requirements of

the Rules been complied with regarding switches, joint boxes, section and distribution boards, protection of cables, method of distribution, lead of cables, lights and

fittings — are all fuses of the fitted cartridge type — are they of an approved type —

If portable lamps for use in dangerous spaces are supplied, are they of a self-contained, battery-fed flameproof type approved for use in dangerous spaces —

Spare Gear, if the vessel is for open sea service have spares been supplied as per Rule *Yes* are they suitably stored in dry situations *Yes*

PARTICULARS OF GENERATING PLANT.

Table with columns: DESCRIPTION OF GENERATOR, No. of, RATED AT (Kilowatts, Volts, Amperes, Revs. per Min.), DRIVEN BY, WHERE DRIVEN BY AN INTERNAL COMBUSTION ENGINE (Fuel Used, Flash Point of Fuel).

GENERATOR, LIGHTING AND HEATING CONDUCTORS.

Table with columns: DESCRIPTION, CONDUCTORS (No. per Pole, Total Nominal Area per Pole Sq. Ins.), COMPOSITION OF STRAND (No., Diameter), TOTAL MAXIMUM CURRENT (Circuit, Rule, Amperes), Approximate Length (Lead and Return) Feet, Insulated with, HOW PROTECTED.

MOTOR CONDUCTORS.

Table with columns: DESCRIPTION, No. of Motors, CONDUCTORS (No. per Pole, Total Nominal Area per Pole Sq. Ins.), COMPOSITION OF STRAND (No., Diameter), TOTAL MAXIMUM CURRENT (In Circuit, Rule, Amperes), Approximate Length (Lead and Return) Feet, Insulated with, HOW PROTECTED.

The Electrical Equipment is installed in accordance with the approved plans.
 All Insulated Conductors are guaranteed to withstand the immersion and resistance tests specified in the Rules.
 The foregoing is a correct description.

CAMPBELL & FISHERWOOD, LTD.

Electrical Engineers.

Date 30 Oct 1938

COMPASSES.

Minimum distance between electric generators or motors and standard compass 86 feet
 Minimum distance between electric generators or motors and steering compass 80 feet
 The nearest cables to the compasses are as follows:—
 A cable carrying 14 Ampères on the feet from standard compass 15 feet from steering compass.
 A cable carrying 14 Ampères 15 feet from standard compass on the feet from steering compass.
 A cable carrying Ampères feet from standard compass feet from steering compass.
 Have the compasses been adjusted with and without the electric installation at work at full power *Yes*
 Has the effect of switching on and off circuits, motors and other electro-magnetic apparatus within the vicinity of the compasses been noted *Yes*
 The maximum deviation due to electric currents was found to be *nil* degrees on *every* course in the case of the standard compass, and *nil* degrees on *every* course in the case of the steering compass.

For SHORT BROTHERS, LIMITED,

E. D. Short

Builder's Signature.

Date 6th. October 1938.

DIRECTOR.

Is this installation a duplicate of a previous case *Yes* If so, state name of vessel *S.S. "Elia S. Kulukundis"*

General Remarks (State quality of workmanship, opinions as to class, etc. *The above instⁿ has been fitted out under special survey. The materials used + workmanship were good. The insulation resistance is good. The dynamo, governors main board + the whole instⁿ etc^d tested under working conditions + found satisfactory. This vessel is eligible in my opinion for notation DF, ES.D.*)

*Wid
 J.H.
 12/10/38.*

Total Capacity of Generators 15.5 Kilowatts.

The amount of Fee ... £ 15 : 10 : 30 at 19.38

Travelling Expenses (if any) £ : : 1/11 19.38

W. T. Badger
 Surveyor to Lloyd's Register of Shipping.

Committee's Minute

FRI 14 OCT 1938

Assigned

See minute on H. Mack

20.12.36.—Transfer. The Surveyors are requested not to write on or below the space for Committee's Minute



© 2021

Lloyd's Register Foundation