

Length on
LOADLINE.

285.0

Frame Depth 7
Rule „ 5 1/2

Ceiling + 20 inches
hatch only
Sheer + .82

Peak
Tanks } incl.

Addition for Keel below base line
for draught record. 2 1/2 inches.

M. Wood.

Sub. No. 17918

30305

Rpt. 12.

FREEBOARD VERIFICATION FORM FOR STEAMERS.

(When received in London Office)

Port Greenock.

TUE. 6 DEC. 1921

Vessel's Name S. S. TING SANG.

Official No.

No. in Reg. Book 33086.

Port of Registry (~~For Foreign Vessels~~) London

~~Iron or Steel~~ Steel State whether Classed by Lloyd's Register Yes (to be)

Name of Owners Ind. China Steam Nav. Co. Date of Verification 5th Dec. 1921.

30583 I have to report that the Freeboard from the centre of disc to the top of the statutory deck line, and the lines in connection therewith, as given below, assigned by the Committee to this vessel, have been correctly marked on the vessel's sides, in accordance with the printed instructions:—

From centre of disc to top of statutory deck line 2. ft. 10 1/2 ins. ✓

From centre of disc to top of statutory deck line }
at awning or part-awning deck . . . } ✓ ft. ✓ ins.

Fresh water line above centre of disc . . . 5 ins. ✓

Indian Summer line above centre of disc . . . 3 1/2 ins. ✓

Winter line below centre of disc . . . 3 1/2 ins. ✓

Winter North Atlantic line below centre of disc 5 1/2 ins. ✓

Distance between the top of statutory deck line on vessel's side and the intersection of the continuation of upper side of wood ~~or iron~~ deck with the vessel's side } at main, spar or upper dk. 1 3/4 ins. ✓

} at awning or pt. awning dk. ✓ ins.

NOTE.—It should be clearly shown whether the statutory deck line is set off from a wood or iron deck.

The Statutory deck line is set off from a Wood deck

R. D. Cairns. Surveyor.

(To be filled up in London Office.)

Statement No. 30305 Date of Committee's Minute 28.11.21

Particulars for Record in Register Book {
Moulded Depth . . . 22 ft. 3 ins.
Freeboard 2 ft. 10 1/2 ins.
Corresponding Draught 19 ft. 11 ins.


Freeboards compared and found correct by Wood date 7.12.21

Is fee paid? has been Form for Certificate

Instructions _____ date _____

Certificate written 7.12.21 Noted for posting

2m,7,19.—T.

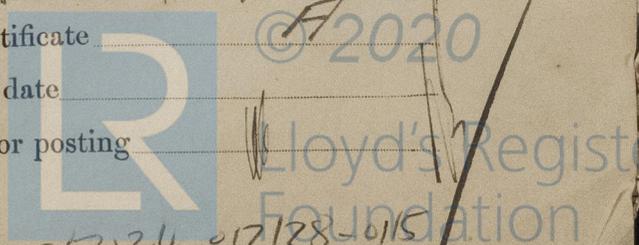

RECOMMENDED DIMENSIONS FROM CENTRE OF DISC TO TOP OF STATUTORY DECK LINE, WOOD (OR IRON) DECK
Fresh Water Line above centre of Disc