


T.S.S. "TAROONA"

IT IS SUBMITTED the Secretary (Glasgow) be informed his remarks are noted and that no objection is seen to securing the baffle plate by means of a nut welded to the shell.

As regards the Foster-Wheeler type the matter has been discussed with this firm in London and it has been pointed out that in this design the arrangements and operating conditions are somewhat different.

Notably the drum is thicker than in the Yarrow design under notice and the distance from stud hole to tube hole is greater. In these circumstances, and as they have experienced no trouble in they are not inclined to officially change their design but added that they would raise no objection to attaching their studs by means of a nut, as suggested, but pointed out that there might be some practical difficulty in accurately locating the nut.

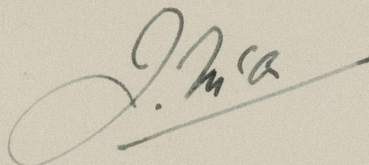

18.12.52.



© 2021

Lloyd's Register
Foundation

012765 012772-0062