

# REPORT ON ELECTRIC FITTINGS.

(OTHER THAN FOR THE PROPULSION OF THE VESSEL)

20 FEB 1925

Date of writing Report Feb. 18<sup>th</sup> 1925. When handed in at Local Office 19/2/25 Port of Hull

No. in Survey held at Hull. Date, First Survey 27-1-25 Last Survey Feb. 13<sup>th</sup> 1925.  
Reg. Book. S. Rawlin "LORD ISLINGTON" (Number of Visits.....)

Built at Selby By whom built Cochrane & Sons Yard No.          When built 1924  
Owners Shipping & Mercantile S.T.C. Co. Ltd Port belonging to Hull Tons { Gross 338  
Net         

Electric Light Installation fitted by Humber Electric Co. Ltd. Contract No.          When fitted         

System of Distribution Two wire  
Pressure of supply for Lighting 100 volts, Heating home volts, Power home volts.

Direct or Alternating Current, Lighting Birect current Power         

If alternating current system, state frequency of periods per second         

Has the Automatic Governor been tested and found efficient when the whole load is suddenly thrown on or off Yes

Generators, do they comply with the requirements regarding overload Yes, are they compound wound Yes  
are they over compounded 5 per cent. Yes, if not compound wound state distance between each generator         

Where more than one generator is fitted are they arranged to run in parallel         , is an adjustable regulating resistance fitted in series with each shunt field         

Are all terminals accessible and clearly marked Yes, are they so spaced or shielded that they cannot be accidentally earthed, or short circuited Yes Are the lubricating arrangements of the generators as per Rule Yes

Position of Generators Starboard side of engine room  
is the ventilation in way of the generators satisfactory Yes, are they clear of all inflammable material Yes

if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the generators           
and         , are the generators protected from mechanical injury and damage from water, steam or oil Yes

are their axis of rotation fore and aft Yes  
Earthing, are the bedplates and frames of the generating plant efficiently earthed Yes are the prime movers and their respective generators in metallic contact Yes Birect compound

Main Switch Boards, where placed Beside dynamo in engine room

If the generators and main switchboard are not placed in the same compartment, is each generator provided with a fuse on each insulated pole as near as possible to the terminals of the generator, additional to that provided on the main switchboard         

Switchboards, are they placed in accessible positions, free from inflammable gases and acid fumes Yes  
are they protected from mechanical injury and damage from water, steam or oil Yes, if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the switchboards          and         

are they constructed wholly of durable, incombustible non-absorbent materials         , is all insulation of high dielectric strength and of permanently high insulation resistance Yes, if semi-insulating material is used, are all conducting parts connected to one pole insulated from the slab with mica or micanite and the slab similarly insulated from its framework         , and is the frame effectively earthed         

Are the following fittings as per Rule, viz.:— spacing or shielding of live parts         , accessibility of all parts Yes, absence of fuses on back of board Yes, proportion of omnibus bars Yes, individual fuses to voltmeter, pilot or earth lamp Yes, connections of switches Yes


Main Switchgear, description of switchgear for each generator and each outgoing circuit, and arrangement of equalizer switches Each outgoing circuit protected by SP. Switch & fuse.

Instruments on main switchboard no ammeters one voltmeters          synchronising device for paralleling purposes         

Earth Testing, state what means are provided at the main switchboard for indicating the state of the insulation of the system         

Switches, Circuit Breakers and Fusible Cut-outs, do these comply with the requirements of the Rules Yes

Section and Distribution Boards, is the construction, protection, insulation, material, and position of these as per rule Yes

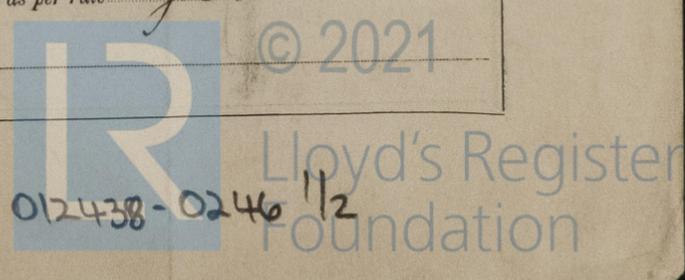

012431-012438-0246 1/2

**Insulation of Cables**, state type of cables, single or twin *Both* are the cables insulated and protected as per Tables III or IV of the Rules *Yes* ✓

**Fall of Pressure**, state maximum between bus bars and any point of the installation under maximum load *One volt.* ✓

**Cable Sockets and other connections**, are the ends of all cables having a sectional area of 0.007 square inch and above provided with soldering sockets *Yes* ✓

**Paper Insulated Cables**. If cables are paper covered, is the dielectric at the exposed ends of the conductor protected from moisture by being suitably sealed with insulating compound *None fitted.* ✓

**Cable Runs**, are the cables fixed as far as possible in accessible positions not exposed to drip or accumulation of water or oil, or to high temperature from boilers, steam pipes, uptakes or other hot objects, or to avoidable risk of mechanical damage *Yes* ✓

**Support and Protection of Cables**, state how the cables are supported and protected *G.I. clips + 3/8" screws for armoured + brass clips for L.C. cables.* ✓

If cables are run in wood casings, are the casings and caps secured by screws ✓, are the cap screws of brass ✓, are the cables run in separate grooves ✓. If armoured and lead covered cables are secured by metal clips, are the clips spaced as per Table VI *Yes* ✓

**Refrigerated Chambers**, if lights are fitted, are the cables and fittings in accordance with the special requirements *None* ✓

**Joints in Cables**, state if any, and how made, insulated, and protected *No joints* ✓

**Watertight Glands and Deck Tubes**, are all cables passing through decks and watertight bulkheads provided with deck tubes or watertight glands *Yes* ✓

**Bushes in Beams and Non-watertight Positions**, where unarmoured cables pass through beams and non-watertight partitions, are the holes efficiently bushed *Yes* ✓ state the material of which the bushes are made *Lead* ✓

**Earthing Connections**, state what earthing connections are fitted and their respective sectional areas ✓

are their connections made as per Rule ✓

**Alternative Lighting**, are the groups of lights in the propelling machinery space arranged as per Rule *Yes* ✓

**Emergency Supply**, state position and method of control of the emergency supply and how the generator is driven *None* ✓

**Navigation Lamps**, are these separately wired *Yes* ✓, controlled by separate switch and separate fuses *Yes* ✓, are the fuses double pole *Yes* ✓, are the switches and fuses grouped in a position accessible only to the officers on watch *Yes* ✓, has each navigation lamp an automatic indicator as per Rule *No* ✓, are separate screens provided for the use of oil and electric side lights *Yes* ✓, are separate oil lanterns provided for the mast head lights and side lights *Yes* ✓

**Fittings**, are all fittings on weather decks, in stokeholds and engine rooms and wherever exposed to drip or condensed moisture, watertight *Yes* ✓, are any fittings placed in spaces in which goods are liable to be stacked in close proximity to them; if so, how are they protected ✓, are any fittings placed in spaces where inflammable or explosive dust or gases are liable to be present, if so, how are they protected ✓, how are the cables led ✓

where are the controlling switches situated ✓

**Searchlight Lamps**, No. of *None* ✓, whether fixed or portable ✓, are their fittings as per Rule ✓

**Arc Lamps**, other than searchlight lamps, No. of *None* ✓, are their live parts insulated from the frame or case ✓, are their fittings as per Rule ✓

**Motors**, are their working parts readily accessible *None* ✓, are the coils self-contained and readily removable for replacement ✓, are the brushes, brush holders, terminals and lubricating arrangements as per Rule ✓, are the motors placed in well-ventilated compartments in which inflammable gases cannot accumulate and clear of all inflammable material ✓, are they protected from mechanical injury and damage from water, steam or oil ✓, are their axis of rotation fore and aft ✓, if situated near unprotected woodwork or other combustible material, are the motors of the totally enclosed, pipe ventilated, forced draught, drip or flame proof type ✓, if not of this type, state distance of the combustible material horizontally or vertically above the motors ✓ and ✓

**Control Gear and Resistances**, are the generator field and motor speed regulators, starters and controllers constructed as per Rule ✓

**Lightning Conductors**, where lightning conductors are required, are these fitted as per Rule *None* ✓

**Ships carrying Oil having a Flash Point less than 150° F.** Have the special requirements of the Rules been complied with regarding switches, joint boxes, section and distribution boards, protection of cables, method of distribution, lead of cables, lights and fittings ✓

If portable lamps for use in dangerous spaces are supplied, are they of a type approved by the Home Office ✓

PARTICULARS OF GENERATING PLANT.									
DESCRIPTION OF GENERATOR.	No of	RATED AT				DRIVEN BY.	WHERE DRIVEN BY AN INTERNAL COMBUSTION ENGINE.		
		Kilowatts.	Volts.	Ampères.	Revs. per Min.		Fuel Used.	Flash Point of Fuel.	
MAIN ...	<i>One</i>	<i>5</i>	<i>100</i>		<i>400</i>	<i>Steam Engine.</i>			
AUXILIARY ...									
EMERGENCY ...									
ROTARY TRANSFORMER									

LIGHTING AND HEATING CONDUCTORS.									
Ref. No.	DESCRIPTION.	No. of Conductors.	Effective Area of each Conductor. Sq. Ins.	COMPOSITION OF STRAND.		Total Maximum Current. Ampères.	Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
				No.	Diameter.				
	MAIN GENERATOR...	<i>1</i>	<i>.02</i>	<i>19</i>	<i>.044</i>	<i>40</i>	<i>10</i>	<i>V.I.R.</i>	
	AUXILIARY GENERATOR								
	EMERGENCY GENERATOR								
	ROTARY TRANSFORMER...								
	AUXILIARY SWITCHBOARDS								
	ENGINE ROOM								
	BOILER ROOM								
	<i>Accumulator</i>	<i>1</i>	<i>.01</i>	<i>7</i>	<i>.048</i>	<i>15</i>	<i>150</i>	<i>V.I.R.</i>	<i>Armoured</i>
		<i>1</i>	<i>.004</i>	<i>7</i>	<i>.036</i>	<i>5</i>	<i>150</i>		
		<i>1</i>	<i>.004</i>	<i>7</i>	<i>.036</i>	<i>5</i>	<i>130</i>		
	WIRELESS								
	SEARCHLIGHT								
	MASTHEAD LIGHT...	<i>1</i>	<i>.0018</i>	<i>1</i>	<i>.048</i>	<i>3</i>	<i>240</i>		
	SIDE LIGHTS ...	<i>1</i>		<i>1</i>		<i>5</i>	<i>60</i>		
	COMPASS LIGHTS ...	<i>1</i>		<i>1</i>		<i>5</i>	<i>60</i>		
	POOP LIGHTS								
	CARGO LIGHTS								
	ARC LAMPS								
	HEATERS								

MOTOR CONDUCTORS.									
Ref. No.	DESCRIPTION.	No. of Motors.	Effective Area of each Conductor. Sq. Ins.	COMPOSITION OF STRAND.		Total Maximum Current. Ampères.	Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
				No.	Diameter.				
	BALLAST PUMP ...								
	MAIN BILGE LINE PUMPS ...								
	GENERAL SERVICE PUMP ...								
	EMERGENCY BILGE PUMP ...								
	SANITARY PUMP ...								
	CIRC. SEA WATER PUMPS ...								
	CIRC. FRESH WATER PUMPS								
	AIR COMPRESSOR ...								
	FRESH WATER PUMP ...								
	ENGINE TURNING GEAR ...								
	ENGINE REVERSING GEAR ...								
	LUBRICATING OIL PUMPS ...								
	OIL FUEL TRANSFER PUMP								
	WINDLASS ...								
	WINCHES, FORWARD ...								
	WINCHES, AFT ...								
	STEERING GEAR ...								
	WORKSHOP MOTOR ...								
	VENTILATING FANS ...								

All Conductors are of annealed copper conforming to British Standard Specification No. 7.  
 The Insulated Conductors are guaranteed to withstand the immersion and resistance tests specified in the Rules.  
 The foregoing is a correct description.

For THE HUMBER ELECTRICAL ENGINEERING Co.

*W. E. Shawcross* Proprietor.

Electrical Engineers.

Date *11/26/25*

COMPASSES.

Distance between electric generators or motors and standard compass *60 feet* ✓

Distance between electric generators or motors and steering compass

The nearest cables to the compasses are as follows:—

A cable carrying *2* Ampères *70* feet from standard compass. *70* feet from steering compass.

A cable carrying *2* Ampères *70* feet from standard compass. *70* feet from steering compass.

A cable carrying Ampères feet from standard compass feet from steering compass.

Have the compasses been adjusted with and without the electric installation at work at full power *Yes* ✓

Has the effect of switching on and off circuits, motors and other electro-magnetic apparatus within the vicinity of the compasses been noted

The maximum deviation due to electric currents was found to be *no* ✓ degrees on *any* course in the case of the standard compass, and *no* ✓ degrees on *any* course in the case of the steering compass.

FOR COCHRANE & SONS, LTD.

*D. J. Johnson* DIRECTOR

Builder's Signature.

Date *12 FEB 1925*

Is this installation a duplicate of a previous case *Yes*. If so, state name of vessel *Lord Linderton*.

General Remarks (State quality of workmanship, opinions as to class, &c. *The electrical installation of*)

*this vessel has been fitted on board under special survey  
 tried under working conditions & found in good order.  
 It is eligible in my opinion to have record of  
 Electric Light.*

*It is submitted that  
 this vessel is eligible for  
 THE RECORD. Elec light*

*23/2/25*

Total Capacity of Generators *5* Kilowatts

The amount of Fee ... £ *5 : 0* : { When applied for, *19/2/1925*

Travelling Expenses (if any) £ : : { When received, *See debit book.*

*John Mackintosh*  
 Surveyor to Lloyd's Register of Shipping.

Committee's Minute

Assigned

50, 12, 53.—Transfer.  
 (The Surveyors are requested not to write on or below the space for Committee's Minute.)



© 2021

Lloyd's Register Foundation