

37031

LLOYD'S REGISTER OF SHIPPING

UNITED WITH THE BRITISH CORPORATION REGISTER

Ship's Name "ANKER" (ex. STROVILI) Official No. _____

Memorandum of alterations reported since ship was surveyed for assignment of Load Lines in Antwerp Dec. 1955

Hatches on Freeboard Dk

No. 3 Hatch & Cross Bunker Hatch combined and made into one hatch the particulars of which are as follows :-

Dimensions :- 25' - 0" x 20' - 0" ✓


Coamings :- Height above deck 30" ✓

Thickness of sides and ends .44 ✓

Stiffeners 10 x 3 1/2 x .50 BA. ✓

Brackets at sides 3 in no. P & S. ✓

Hatch Beams 4 in no. spaced 4'-6" to 5'-8" apart

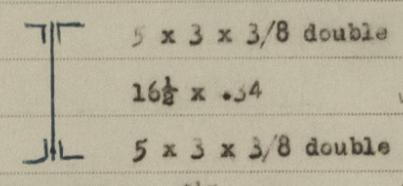

Bearing surface 4 1/2" ✓

The main span, about 5'-1 1/2"
This beam was accepted for 5'.

Hatch covers approved "Simplex" type of Steel fitted fore and aft. ✓

Bearing Surface 5" x 3" ✓

Cleats spaced 24" apart. ✓

2 in no. Tarpaulins fitted. ✓

Locking Bars fitted ✓

J. Coates (J. COATES)
SURVEYOR TO LLOYD'S REGISTER
ANTWERP

copy placed on board ship.

Copy 1/4

Nobis
AR.
15.2.56

