

~ MIDSHIP SECTION ~
 STEEL SCREW TRAWLERS.
 ~ "MERSEY" CLASS ~

138' 4 BP. x 23' 9" EX x 13' 6" MLD

NOS 874 TO 933 INCLUSIVE.

COMPLETE STEEL DECK FITTED THROUGHOUT SHIP
 ENGINE AND BOILER CASING AS PREVIOUSLY APPROVED.

PLAN No. 2505

FOR ENCLOSURE TO


MESSRS LLOYDS REGISTER

OF SHIPPING - LONDON - ROM

COCHRANE & SONS, LTD.

SHIPBUILDERS, SEELY

DATE 22/6/18

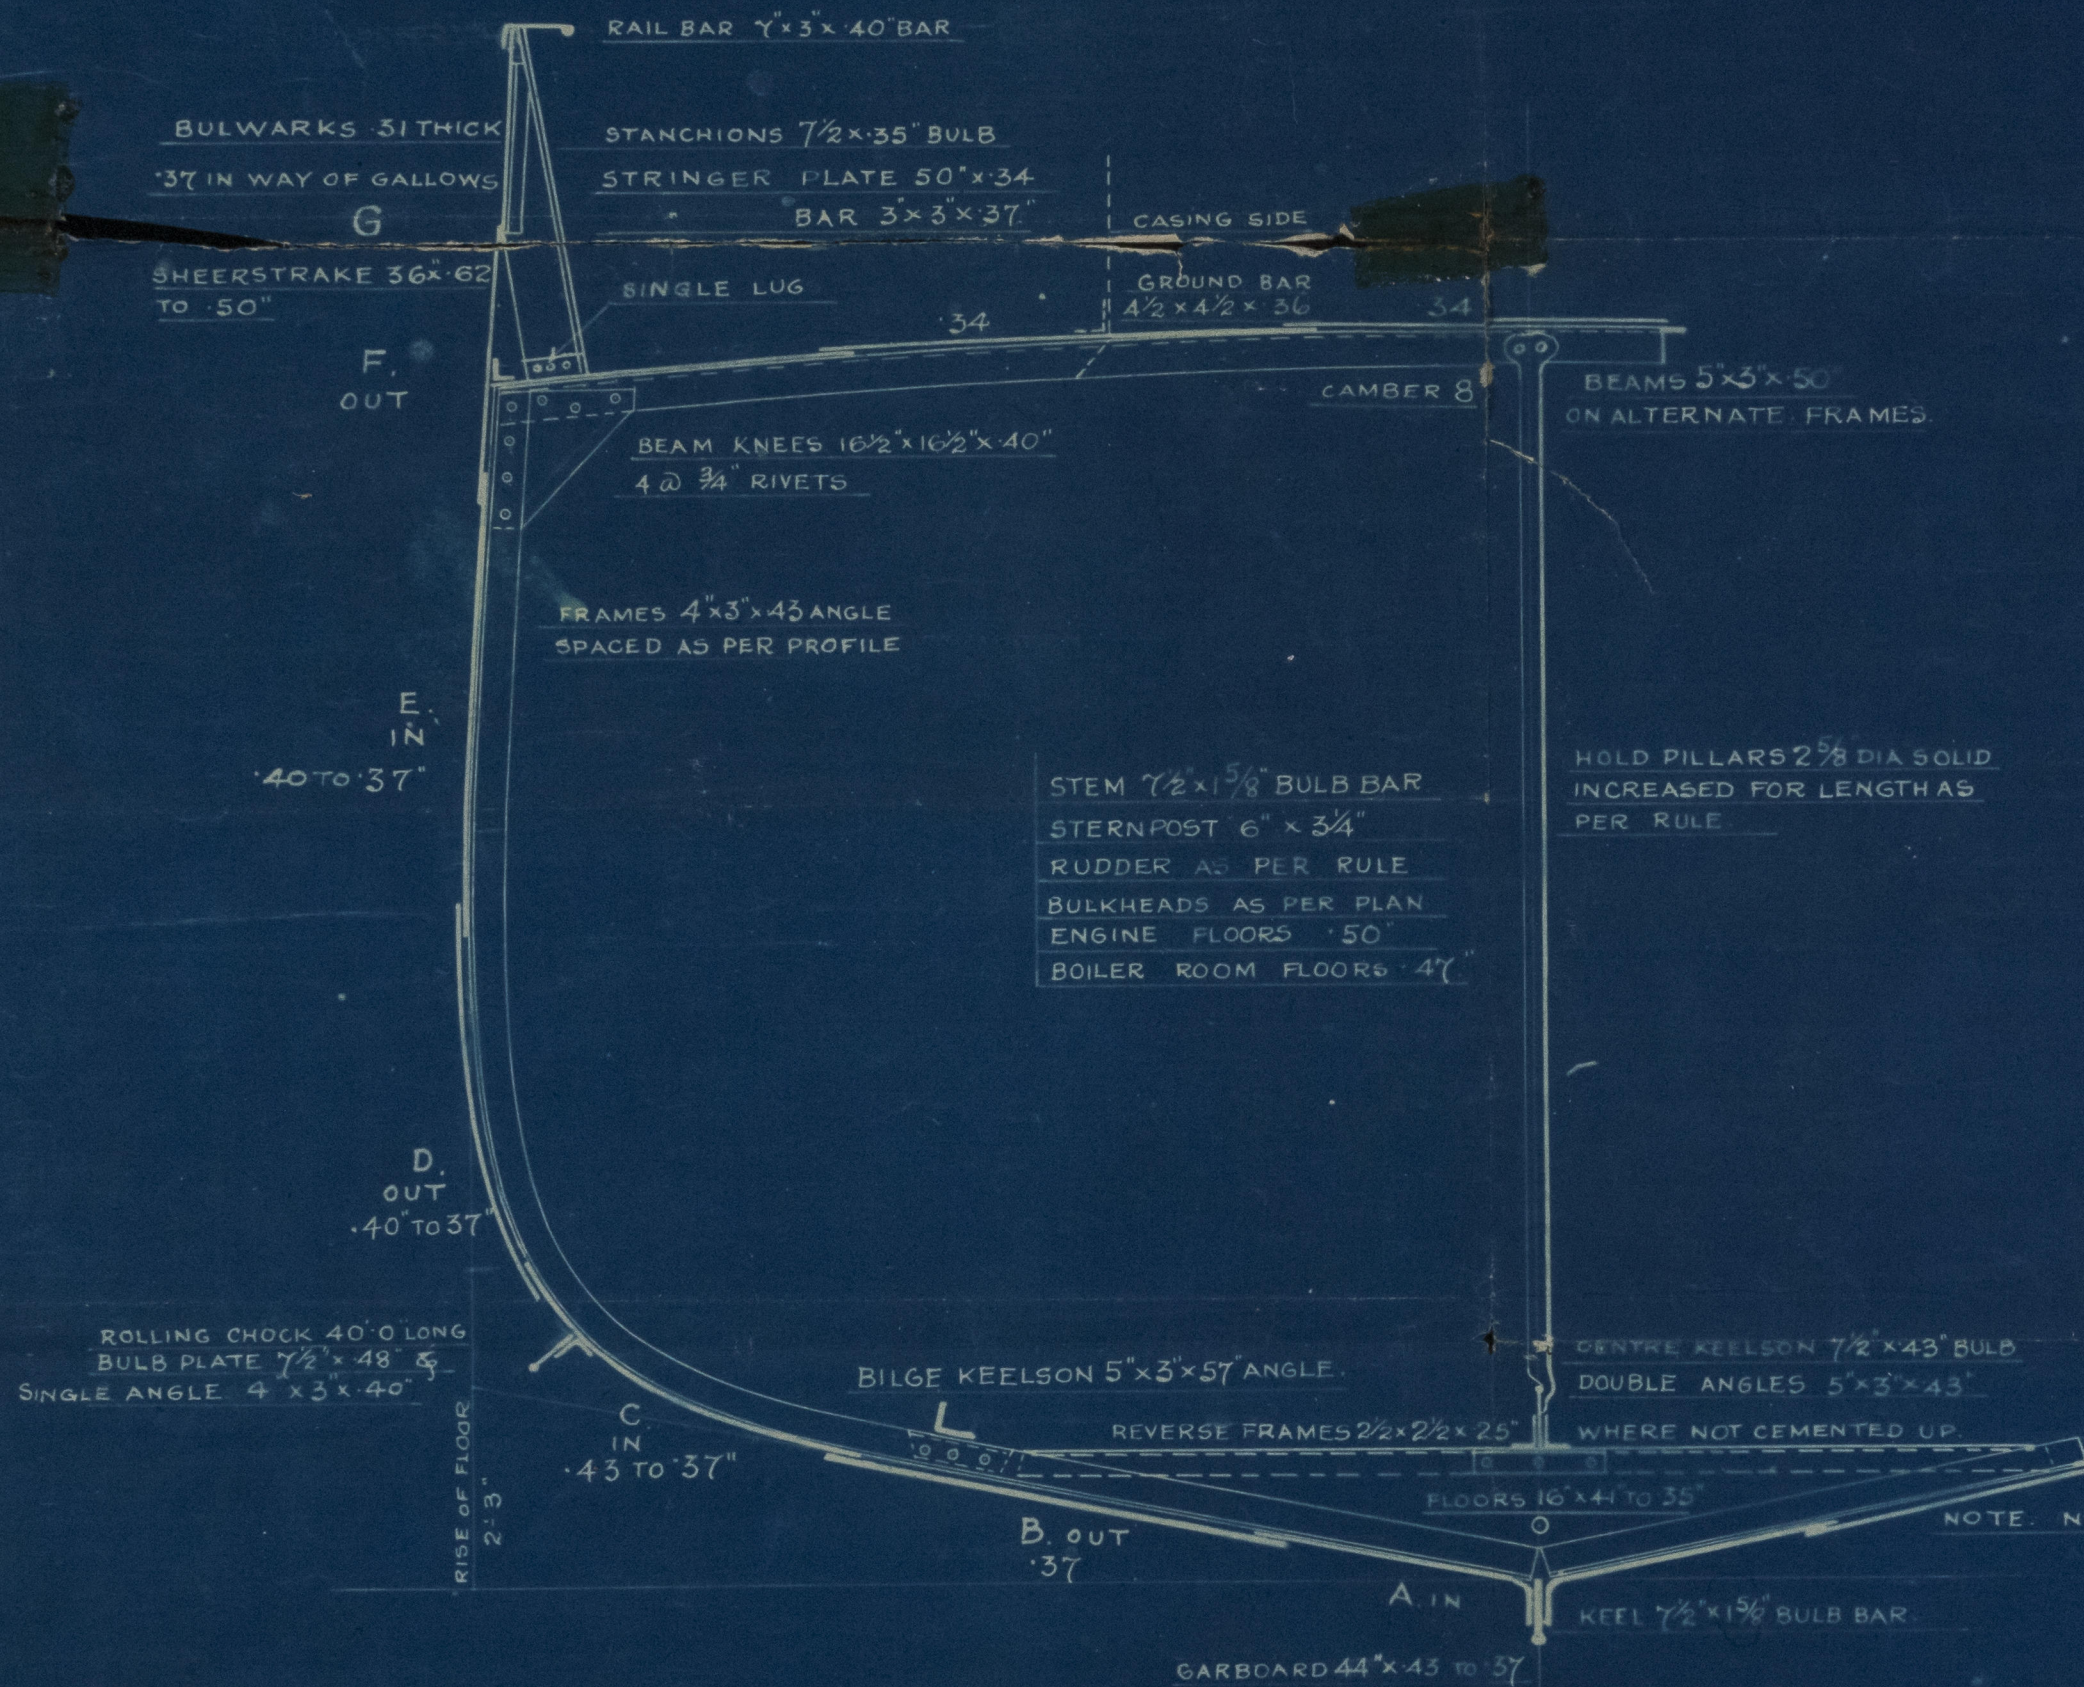

NUMERALS

TRANSVERSE B+D 37.12
 LONGITUDINAL (B+D) XL 5134.80

PROPORTIONS

BREADTHS IN LENGTH 5.85
 DEPTHS IN LENGTH 10.24
 DEPTH "d" 12.17

EQUIPMENT

1ST BOWER ANCHOR 9 CWTs - STOCKLESS
 2ND " " 7 1/4 " "
 KEDGE ANCHOR 3 1/4 CWTs - EX. STOCK
 120 FMS 1 1/2" STUD LINK CABLE
 60 " 6" HAWSER
 60 " 5" WARP

RIVETING

BUTTS OF SHELL PLATING LAPPED AND DOUBLE RIVETED, EXCEPT GARBOARD AND SHEERSTRAKE WHICH WILL BE STRAPPED AND DOUBLE RIVETED
 SHELL LANDINGS DOUBLE RIVETED
 BULWARK LANDING SINGLE RIVETED
 SHELL RIVETS 3/4" DIA IRON
 KEEL, STEM AND STERNFRAME RIVETS 1" DIA IRON.

~ SCALE 1/2 IN = 1 FT. ~



Lloyd's Register
 Foundation


013890-013899-5290

for Eneddon

Mersy
Midship

013890-013899-0290

MERSY Type Trawler
Midship Section.
138'4" x 23'9" ex x 13'6" max.

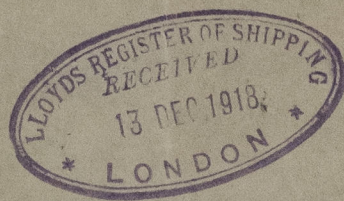

Phyllissia
Hall 30718

3

013890-013899-0290



© 2021

Lloyd's Register
Foundation