

COPY.

Lloyd's Register of Shipping



Port MOBILE, ALABAMA



9th February 1951

3865

This is to Certify that
W. F. Chapman

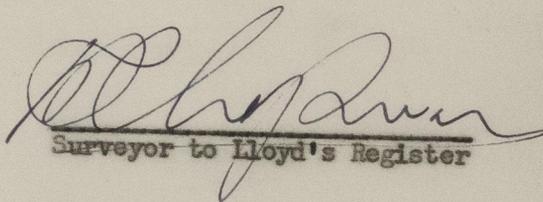
the undersigned Surveyor to this Society did at the request of
The Owner's Representative attend on board the steel screw steamship
"PLATANO"

5949 tons gross of Tela on the 5th February 1951 for the purpose of witnessing
tests, as set forth below, on two new steel cargo derricks installed at No.2
hatch.

The two derricks were rigged at an angle of approximately 15° to the horizon-
tal and a proof dead load of 14,000 lbs. representing 25% in excess of the
safe working load of 5 tons, suspended with the ship's normal tackle and
winches and maintained for one minute.

The above tests were satisfactorily carried out and the derricks and gear
accessory thereto successfully withstood the tests.

The derricks were stamped near the lower end:- Tested 14000 lbs.
5 Oct. 51 WFC


Surveyor to Lloyd's Register

Fee: \$35.00

This Certificate is issued upon the terms of the Rules and Regulations of the Society, which provide that:—
While the Committees of the Society use their best endeavours to ensure that the functions of the Society are properly
performed, it is to be understood that neither the Society nor any Member of any of its Committees is under any circumstances
to be held responsible for any inaccuracy in any report or certificate issued by the Society or its Surveyors, or in
entry in the Register Book or other publication of the Society, or for any error of judgment, default or negligence of
any of its Committees or any Member thereof, or the Surveyors, or other Officers or Agents of the Society."

M 7-48 PRINTED IN U.S.A.