



Lloyd's Register of British and Foreign Shipping.

(Report on Vessel No. _____ Port _____)

No. _____ SHIP ~~FORGINGS OR~~ CASTINGS.

I have to report that the undermentioned ~~Iron or Steel Forgings or~~ Castings, manufactured by Messrs Cammell & Co of Sheffield for the Vessel No. 124, being built by Messrs Workman Clark of Belfast have been inspected by me as set forth below, and found to be, so far as can be seen, good.

- 1 Rudder head. 7.385.
- 1 " frame. A. 575.

Mark on Forgings.


Lloyd's
No. A575 & F 385.
R

J. W. Dimmock
6/1/96.

	STERN FRAME.	RUDDER FRAME.	STEM.
Material*	/	Siemens Martin	/
How made	/	cast steel	/
Dimensions	/	10 1/2 head	/
Progress on Inspection	/	Cast.	/
Date when Inspected	/	14/4 + 15/11/95 5/12/95	/

SKETCHES OF FRAMES SHOWING POSITION AND DESCRIPTION OF WELDS OF FORGINGS, OR PARTICULARS OF TESTS APPLIED TO CASTINGS.

Tests: — Head, Tensile 29.1 tons Elong 13% in 5"
Frame, 30.0 tons " 16.2 in 5"
Bends, both 180° good
Draw, 7 ft good.

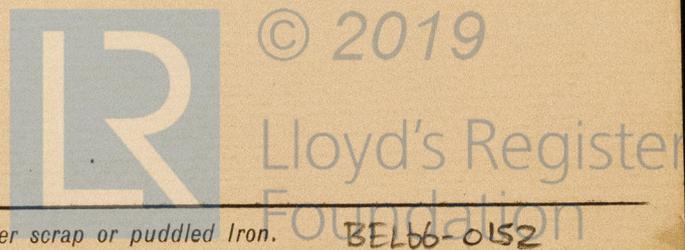

"124" "Langton Grange"

Belfast Report

No. 4619.



© 2019

Lloyd's Register
Foundation