

REPORT of SURVEY for REPAIRS.


3547

Rec'd 26/9/22

No. in Reg. Book. 3547 Survey held at Glasgow Date, first Survey 2nd Sept Last Survey 10th Sept 1872
 on the B^K Guyana Master Bolton
 Tonnage 593 built at Ayr When built 1870
 By whom built Gullaston Owners Living & Co
 Port belonging to Glasgow Destined Voyage Glas Demerara
 If Surveyed Afloat or in Dry Dock Newburgh Shipway
 Last Survey, No. 6140 Port Greenock Classed 14 A1
 2.72

REPAIRS, &c.

The Copper Sheathing stripped off the bottom the vessel caulked from keel to Gunwale.
 The bottom resheathed with yellow metal on felt.
 In the better stowage of sugar cargoes the angle-irons have now been taken off the upper edges of the hold-beams, and half-round iron $3 \times 1\frac{1}{2}$ ins. riveted on in lieu, as per sketch. The double angle-irons fore and aft are now connected with knee plates as shown.

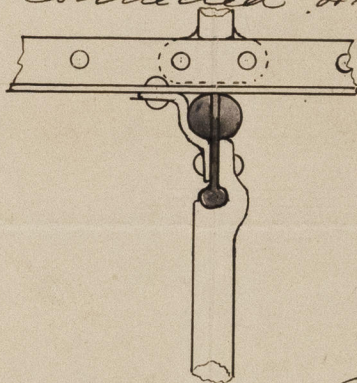

Present Condition of the

Decks	<u>Good</u>	Treenails	<u>Good</u>	Windlass and Capstan	<u>Good</u>
Waterways	<u>✓</u>	Breasthooks and Stemson	<u>✓</u>	Pumps	<u>✓</u>
Comings	<u>✓</u>	Transoms, Pointers, and Crutches	<u>✓</u>	Boats	<u>Good</u>
Upper Deck Beams & Fastenings	<u>✓</u>	Timbers of the Frame at the openings	<u>✓</u>	Masts, Yards, &c.	<u>✓</u>
Lower Deck Beams & Fastenings	<u>✓</u>	Ditto Ditto at other places	<u>✓</u>	Condition, how ascertained	<u>Survey</u>
Planksheers	<u>✓</u>	Keelsons	<u>Where</u>	Sails	<u>✓</u>
Sheerstrakes	<u>✓</u>	Clamps and Shelves	<u>✓</u>	Anchors No. of	<u>Where</u>
Topsides	<u>✓</u>	Ceiling	<u>Seen</u>	Cables	<u>✓</u>
Wales	<u>✓</u>	Rudder	<u>Seen</u>	Hawsers and Warps	<u>Seen</u>
Plank (Bottom) and Counter	<u>✓</u>	Copper <u>When put on</u> <u>9.72</u>	<u>✓</u>	Standing & Running Rigging	<u>✓</u>
		Caulking of			
		Bottom, Deck, & Waterways			
Engine Room Skylights	<u>✓</u>	Coal Bunker, Openings, Lids, &c.	<u>Good</u>	Cargo and Main Hatchways	<u>Good</u>
		Scuppers	<u>Good</u>	Hatches	<u>Good</u>

General Observations and Opinion,

This vessel is in good and efficient condition, eligible to remain as classed 14 A1.

W. Thompson

The Amount of Entry Fee.....£ : : : is received by me,

Special..... 2 : 2 : :

Certificate (if required) : : : :

Committee's Minute 27th September 1872.

Character assigned 14 A1

recorded
T. B. W.



© 2019

Lloyd's Register Foundation

GL144-0430