

Report of Survey for Repairs, &c., of Engines & Boilers.

THURSDAY 13 DEC 1884

(Received at London Office.)

No. 6442
 No. in Survey held at Glasgow Date, first Survey 18th Nov^r Last Survey 2nd Decem^r 1884
 R.g. Book. 1035 on the Machinery of the S. S. Strathadder (Number of Visits 7)
 Tonnage, Gross 338 Built at Paisley When built 1883 5th
 Ditto, Net 148 Owners J. Hayssons Port belonging to Glasgow
 Diameter of Cylinder 19.36 Engines made by J & Y Young When made 1883
 Length of Stroke 27 Boilers made by Do When made 1883
 Pressure of Steam 80 lbs If Surveyed Afloat or in Dry Dock Both English slipway Classed 100A. 3-84
 Registered Horse Power 60 (State Name of Dock.)
 Last Survey No. Port + L.M.C. 7-83

Particulars of Repairs and Examination Annual Survey
 (State clearly the cause of Repairs if any, and in detail, the nature and extent of Examinations and subsequent Repairs. Repairs on account of Damage should be separated from Repairs due to other causes. State also the dates and initials of any letters respecting this case.)

Engines & boilers of this vessel opened out & there were examined the cylinders, pistons, slide valves, pumps, crank-shaft & shafting also main boiler, safety valves, pipes &c. The propeller has been refitted on shaft & 3/8" iron plate liners have been fitted between each coupling to give clearance between propeller & outer end of stern tube. Sea cocks, valves &c all overhauled while the vessel was on the slip.

It is submitted that this vessel is eligible to have the notification & sure 12.84 renewed J.M. 18/12/84

General Observations, Opinion, and Recommendation:— The engines & boilers of this vessel are now in good & safe working condition and in my opinion eligible to be classed + L.M.C. 12-84 in the Register Book.
 (State clearly what alteration, if any, is suggested to be made in the existing notification of the vessel's machinery in the Register Book, consequent upon this survey.)


Office or Registration Fee (per Sec. 27) £ : :
 Survey Fee (per Section 28) £ 2 : 2 :
 Special Damage Fee (per Section 28) £ : :
 *Certificate (if required) £ : :
 Travelling Expenses (if chargeable) £ : :
 Committee's Minute
 Assigned

received by me, [Signature] 14/12/84

Walter E. Robson
 Engineer Surveyor to Lloyd's Register of British and Foreign Shipping.
Glasgow

FRIDAY 19 DEC 1884

+ L.M.C. 12.84

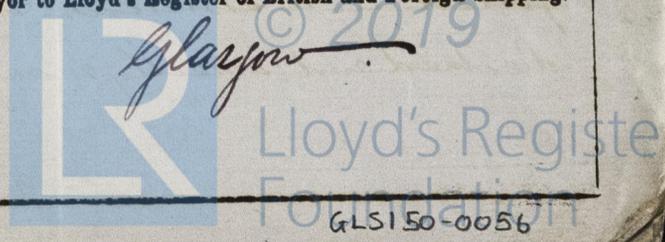

State of a Report is sent on the Hull of the Ship

Insert Character of Ship and Machinery precisely as in the Register Book.

6992

Yes

* Certificate to be written on or below the space for Committee's Minute.

Lloyd's Register of British and Foreign Shipping
 GLS150-0056