

Sl. 7116

Report of Survey for Repairs, &c., of Engines & Boilers.

(Received at London Office,)

No. _____

No. in Reg. Book. *Survey held at London* Date, first Survey _____ Last Survey *Apr. 9 1885*

454 on the Machinery of the *S.S. "Gleulyon"* (Number of Visits _____)

Tonnage, Gross *2118* Built at *Glasgow* When built *1872-10*

Ditto, Net *1373* Owners *Mc Gugin & Co* Port belonging to *Glasgow*

Diameter of Cylinder *40 & 70* Engines made by *Lon. & Glas. Co.* When made *1872*

Length of Stroke *45* Boilers made by _____ When made _____

Pressure of Steam *65 lbs.* If Surveyed *Afloat or in Dry Dock* (State name of Dock.) _____

Registered Horse Power *275* Character in Register Book. *Classed 100 A 1*

Last Survey No. _____ Port _____ *L.M.C. 3.81 B.S. 12.83*

Particulars of Repairs and Examination Of *Which Boiler*

(State clearly the cause of Repairs if any, and, in detail, the nature and extent of Examinations and subsequent Repairs. Repairs on account of Damage should be separated from Repairs due to other causes. State also the dates and initials of any letters respecting this case.)

This boiler was taken out of S.S. "Gleuearn" & repaired at the Thames Iron Works, when a new furnace crown was fitted, stays at furnace sides, & back of combustion, about 2ft. up renewed, a new back/bottom part renewed & new tubes. The boiler was satisfactorily tested with water to 90 lbs in

General Observations, Opinion, and Recommendation:—


It is submitted that this report be forwarded to the Glasgow surveyors for their guidance. The vessel being now at that port having new main boilers fitted, & it is proposed to fit this which boiler at the same time.

Fee or Registration Fee (per Sec. 27)	£	:	:	} received by me, } 188
Survey Fee (per Section 28)	£	:	:	
Special Damage Fee (per Section 28)	£	:	:	
Certificate (if required)	£	:	:	
Traveling Expenses (if chargeable)	£	:	:	

Geo. E. Milner
Engineer Surveyor to Lloyd's Register of British and Foreign Shipping.

Committee's Minute

Assigned

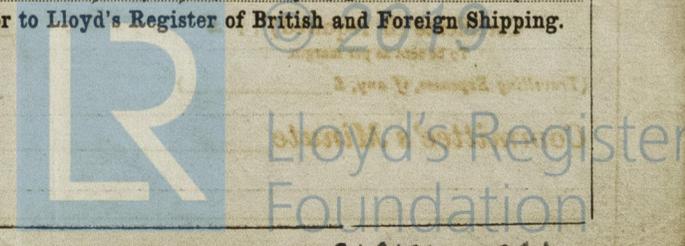

Insert Character of Ship and Machinery precisely as in the Register Book.