

Lloyd's Register of British and Foreign Shipping.

(Report on Vessel No. 11577 Port Glasgow
is "Glasgow"?)

No. 5349 SHIP FORGINGS OR CASTINGS.

The words FORGINGS OR CASTINGS, IRON OR STEEL, should be struck out as may be required.

I have to report that the undermentioned ~~Iron or Steel Forgings or~~ Castings, manufactured by The Springfield Steel Coy. of Glasgow for the Vessel No. 146, being built by Messrs. Murdoch & Murray of Port Glasgow have been inspected by me as set forth below, and found to be, so far as can be seen, sound and efficient

Mark on Forgings.

Lloyd's
 No. 5349
R.W.

Robert Wright
Glasgow 31/7/96

SHAFT BRACKETS

| | STERN FRAME. | RUDDER FRAME. | STEM. |
|------------------------|-------------------------------|---------------|-------|
| Material* | <u>Steel (Siemens Martin)</u> | | |
| How made | <u>Cast</u> | | |
| Dimensions | <u>-</u> | | |
| Progress on Inspection | | | |
| Date when Inspected | <u>30/7/96</u> | | |


SKETCHES OF FRAMES SHOWING POSITION AND DESCRIPTION OF WELDS OF FORGINGS, OR PARTICULARS OF TESTS APPLIED TO CASTINGS.

The above mentioned Castings have been subjected to drop, hammering, tensile, and bend tests in accordance with the Rules of this Society for cast steel, with good results.

| | Diam. | Area. | Total Tons | Sq. in. | Ex. in 8" |
|------|-------|-------|------------|---------|-----------|
| No 1 | 1.0 | .785 | 25.1 | 31.9 | 13% |
| No 2 | 1.0 | .785 | 27.0 | 34.3 | 23% |

Fee (if any chargeable) £

To be paid at

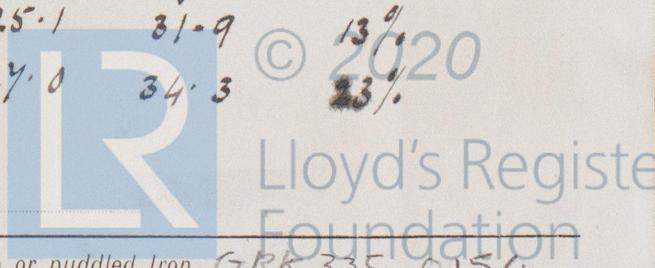

* If of Iron, state whether scrap or puddled Iron. GRR 335-0154

