

Lloyd's Register of Shipping,


"Broströmia," Packhusplatsen 6,

Gothenburg, 17th July, 1929.



The Secretary,

LONDON.

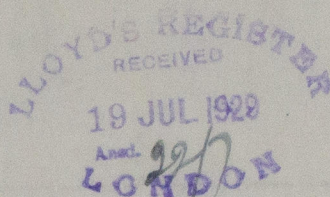

Dear Sir,

With reference to your letter of the 10th May last regarding the equipment of the steamer "SOLGLINT", I have to state that the equipment number is now 60237 (equipment letter B+).


The cables have been examined and there are 22 lengths on board, one of which has been found to be less than $2 \frac{13}{32}$ ", the minimum diameter permissible by Table 56 of the Rules for a $2 \frac{11}{16}$ " cable. The remaining 21 lengths are well over $2 \frac{13}{32}$ ". In accordance with your letter of the 11th December last it will therefore be necessary to renew one length and place 17 fathoms of $2 \frac{11}{16}$ " additional cable on board.

The anchors have also been examined and compared with certificates and found to be as follows:-

	Cwts.	qrs.	lbs.
1 stockless bower anchor	84.	2.	9
1 " " "	84.	1.	22
1 " " "	83.	3.	11
1 " " "	69.	3.	11
	322.	2.	25
1 ordinary stream anchor	14.	1.	3. (ex stock).

I am, Dear Sir,
Yours faithfully,

Geo Melsted

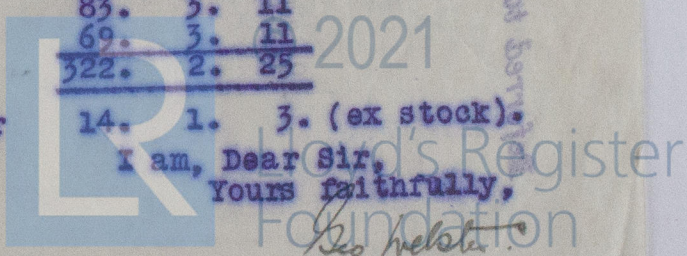

Lloyd's Register
Foundation

R

100

• 2010 •

100

67

Referred to the Chief Ship Surveyor.

Y. M. D. 1891. T. 1. (1891-1892).

• 1500