

\* 18206

# Report of Survey for Repairs of Engines and Boilers.

No. 18  
 Survey held at Goole and Hull Date, first Survey 8 Jan. Last Survey 5 Feb. 1877

on the Iron screw steamer "Marianne Briggs" Tons 396  
Yorkshire coal & Co. Port belonging to Goole Character in Register Book. 90 A1  
1, 76

Diameter of Cylinder 23 1/2 x 44" Engines made at South Shields When made 1874  
 Length of Stroke 30" By whom made J. Readhead & Co.  
 Pressure of Steam 65 lbs  
 Indicated Horse Power 80

## Particulars of Repairs and Examination


New end to the propeller shaft, new brass liners and new keys. New cast iron brackets for staying the cylinders. Joint of Main steam pipe renewed. Spindle of the valve on the Ships side straightened. New glands with guards to sea-cocks. Safety valves ground in. All sea-cocks and valves ground in. All working parts overhauled and adjusted. Donkey boiler cleaned.

In my opinion the vessel is now eligible for the Character Lloyds M.C. in the Register book.

Amount of Fee ... £ 3 : 3 : - received by me, HEK  
 Certificate (if required) ... £ - 1 : 7 : - 28 Feb. 1877  
 Travelling Expenses, if any, £ 2 10 0

H. Readhead  
 Engineer Surveyor to Lloyd's Register of British & Foreign Shipping.

Committee's Minute 18

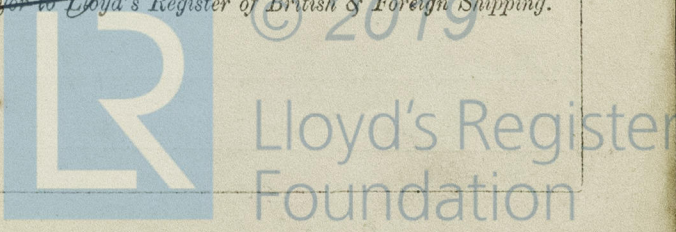

IRON471-0236