

Report of Survey for Repairs of Engines and Boilers.

No. 725447 (Rec 8.4.79)
 No. in Reg. Book. Survey held at London Date, first Survey March 20 Last Survey March 31 1879

on the S.S. "Palmyra" Master _____

Built at Newcastle When built 1866

Tons 707 Owners London S.S. Comp. Port belonging to London Years assigned. 90 Character in Register Book. AL.
960 10.78.

Diameter of Cylinder 25 1/4 x 48" Engines made at Newcastle When made 1866

Length of Stroke 30 Pressure of Steam 75 lbs per inch By whom made R & W Hawthorn


Registered Horse Power 140

Particulars of Repairs and Examination Cylinders and slides examined and found good. Crank shaft examined and found good, all sea connections overhauled and ground in. Propeller taken off tail shaft drawn and examined found good. New propeller fitted. Thrust Block brasses bored out and new brass collars fitted. Donkey Boiler examined, Stop Safety valves altered. Main Boiler Superheater examined and drilled to ascertain thickness, least thickness found in Combustion Chamber. Furnace 3/8 full. Two new screw stays fitted in Superheater, several new screw stays fitted to each combustion chamber back and sides. 2 patches fitted to combustion chamber backs and one seam reworked. Patch fitted on one boiler back where blow off cock had been fixed and blow off cock shifted. Safety Stop valves ground in, Superheater drain pipe altered to clear space.

The machinery and boilers of this vessel are now in good order and safe working condition and in our opinion render the vessel eligible to remain as classed.

The Amount of Fee ... 9/4/79 £ 3 : 3 : 0 received by me, James Milton & Moreton
 Certificate (if required) ... £ : : 3 May 1879 }
 (Travelling Expenses, if any, £)

Committee's Minute 16th April, 1879.
Tuesday, February, 3rd 80.
T.B.W.

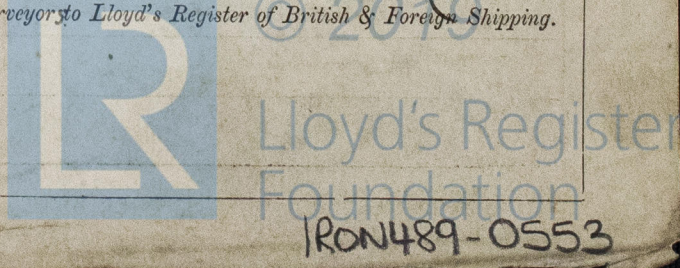

IRON489-0553

The making of this vessel has been
examined at S.T. No 3 and reported
to be in good condition. Submitted
that she is eligible to remain
as classed, but owing to not
complying with the rules
as far as ~~rules~~ and
papers are concerned
she is not eligible to
have Lloyd's M.C.

W.D.

31.3.78



© 2019

Lloyd's Register
Foundation