

Report of Survey for Repairs of Engines and Boilers.

No. 358. (Received at London Office, 11/7/80)
 Survey held at *Hamburg* Date, first Survey *13th May* Last Survey *18th May* 18 *80*
 Reg. Book. *263* on the Machinery of the *S.S. Germania* (Number of Visits)
 Tonnage, Gross *436* Built at *Lindeland* When built *1856*
 Ditto, Net *432* Owners *J. J. Bollbach* Port belonging to *Hamburg*
 Diameter of Cylinder *27 & 52* Engines made by *Amphry's & Pearson* When made *1872*
 Length of Stroke *33* Boilers made by *ditto* When made *1872*
 Pressure of Steam *45 lbs* If Surveyed Afloat or in Dry Dock *Patent Slip* 13th May
 Registered Horse Power *110* Classed *80 A*
 Last Survey No. *278* Port *Hamburg* *Lloyd's Bull.*

Particulars of Repairs and Examination of Engine and Boilers with requirements to the Rules. The vessel was placed on a patent slip, the ship was fitted with a new propeller = tail shaft and the stern pipe with a new whitmetall bush all sea connections were overhauled and found good. —
 Engine The Cylinder covers were removed and the Pistons found in good order, the slide valves examined and found good, bearings of main shaft examined and found good, air pump opened and fitted with few new india rubber valves, circulating pump good, feed and bilge pumps were in good working order. —

Boilers examined inside and outside some plates in furnaces and combustion chamber bored on different places and found good, safety valves examined and found correct. —

Donkey had lately a repair and is in good working order now. —


General Observations, Opinion, and Recommendation: — The Engine & Boilers of this vessel are in good working order now and in my opinion entitle the vessel to be marked with *Lloyd's Bull.* *S. 5.80* in the Register Book, subject to the Boilers being further examined in 12 months

Entry or Registering Fee ... £ 2 : 2 :
 Survey Fee ... £ : :
 Certificate (if required) ... £ : :
 (Travelling Expenses, if any, £)

received by me, 18

J. A. Libberts
 Engineer Surveyor to Lloyd's Register of British & Foreign Shipping.

Committee's Minute 18
 Assigned

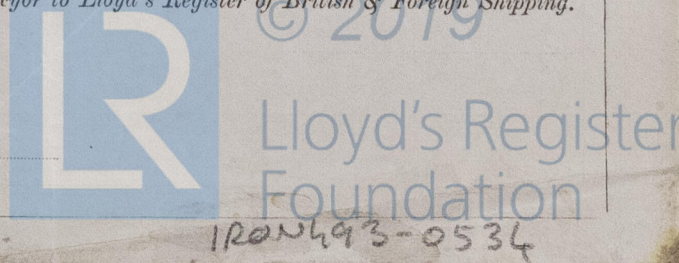

120493-0534

It is submitted that this
vessel is eligible to have
the notification Lloyd's
Incl. 5-80 recorded in
the Register Book
Subject to the
holders being
again examined
in 12 months

M
27/80



© 2019

Lloyd's Register
Foundation