


No. 234

Diagonal 24' 0" - 12' 6" - 36' 6" - 29' 19" - 24'



Section of Bowport showing doubling plates, vertical Diaphragm plates & 3 angles running full length.  
Thickness of plates  $\frac{5}{16}$  &  $\frac{3}{16}$   
" doubling "  $\frac{5}{16}$   
" diaphragm "  $\frac{5}{16}$   
Angles  $3\frac{1}{2} \times 3\frac{1}{2} \times \frac{1}{16}$   
Seams single riveted  
Butts double riveted  
" at knightheads butts  
all straps  $\frac{1}{2}$  thicker than plates.

Makes of Iron for Bowport.  
Messrs. The Bowditch Iron Co.




Section of Yards showing doubling plates.  
Seams single riveted  
Butts lapped double riveted  
Fore & M. Lower Yds.  $83' 0" \times 20'$   
Plates  $\frac{5}{16}$  -  $\frac{1}{16}$  &  $\frac{3}{16}$   
Doubling plates  $\frac{1}{16}$   
Fore & M. L. Topmast Yds.  $44' 0" \times 14'$   
Plates  $\frac{5}{16}$  -  $\frac{1}{16}$  &  $\frac{3}{16}$   
Doubling plates  $\frac{1}{16}$   
Mizen lower Yds.  $68' 0" \times 16'$   
Plates  $\frac{5}{16}$  -  $\frac{1}{16}$  &  $\frac{3}{16}$   
Doubling plates  $\frac{1}{16}$   
Mizen lower topmast Yds.  $59' 0" \times 13'$   
Plates  $\frac{1}{16}$  -  $\frac{3}{16}$  &  $\frac{2}{16}$   
Doubling plates  $\frac{3}{16}$

Makes of Iron for Yards  
Messrs. The Elswick & Co. Iron Co.



Section of Foremast & Mainmast showing doubling plates & T iron.  
Thickness of plates  $\frac{5}{16}$  &  $\frac{1}{16}$   
" doubling "  $\frac{1}{16}$   
Size of T iron  $6 \times 3 \times \frac{1}{16}$   
3 plates in round  
Butts seams single riveted  
Butts double riveted

Makes of masts.  
Messrs. J. W. Underhill, Wolverhampton.

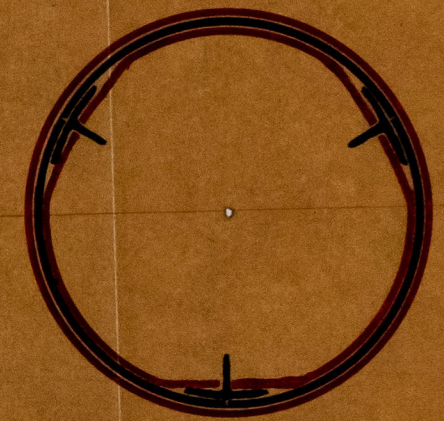

Section of Mizzenmast showing doubling plates & T iron.  
Thickness of plates all  $\frac{1}{16}$   
" doubling plates "  $\frac{1}{16}$   
Size of T iron  $6 \times 3 \times \frac{1}{16}$   
3 plates in round  
Butts seams single riveted  
Butts double riveted.

H. Graham Brewster  
W. Pitt & Co. Ltd.

	Along deck	Across	Between	Distance
Foremast	58' 0"	23' 9"	81' 9"	29
Mainmast	61' 0"	21' 6"	82' 6"	30
Mizzenmast	54' 0"	21' 8"	45' 8"	24

Ship "Rodney" Report No 10843