


Ship "Old Kensington"
Particulars of Rigging & Fixtures thereof

Fore and Main Rigging - 5 Shrouds - 1 Cap Shroud. 3 Topmast Backstays. 2 Foretopmast Backstays. and 1 Royal ditto

Mizen Rigging - 4 Shrouds. 1 Cap Shroud
2 Topmast backstays - 1 Topgall^t Stay (back)
1 Royal back stay -

Main & Fore Chain plates 2". Cap and Topmast backstay plates 2". Topgall^t do 1 5/8" Royal 1 3/8" Mizen Chain plates 1 1/2". Capstay & Backstays attached to running over plate of Poop. as under

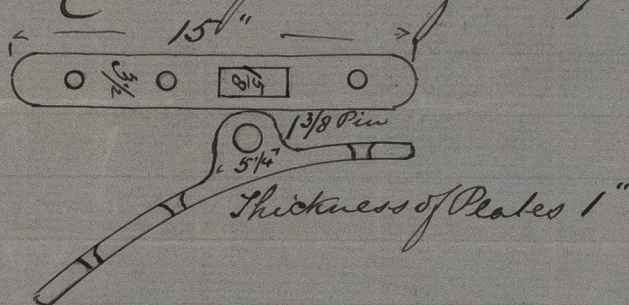

Iron Bits fitted for Main Stays and Main Topmast Stays - Fore Stays attached to 1 1/4" Eye plates fitted to thick cross knighthead plate. Foretopmast Stays attached to cutwater. Mizen and Mizen topmast Stays secured to main mast.

Chain plates attached to upper part of Sheer-strake (except as above noted) with 4. 1 1/4" Links

Main & Fore lower Rigging & Stays loose -	5 1/2"
Topmast backstays & Stays	5 1/2"
Topgall ^t do & do -	3 1/2"
Topmast Rigging	2 3/4"
Lower lifts	4
Topmast	3 1/4"
Topgall ^t Rigging	2 1/4"

J. E. L.

P. J. Over

Mizen Rigging & Backstays	lower	4 1/2
— " —	Stay —	4 3/4
— " —	Topmast Stay	4
— " —	Rigging	2 1/2
— " —	Topfall —	2
— " —	Backstays	3
Fore & Main	Royal do	3
Mizen	do — do	2 1/2
Cross Jack	lifts	3
Mizen Topsail	do	2 3/4
Inner Libstays & Guys		4
Outer	do — do	3 1/2
Lanyards for Fore & Main lower Rigging		5 3/4
do — Mizen	do	4 3/4

Wmth C. Davey
Jan^y/75



© 2021

Lloyd's Register
Foundation