

13853

of SURVEY for REPAIRS.

Survey held at London Date 25 Oct & Nov 1847  
on the Brig "Amy" Master Cram  
Tonnage 166 Built at Poole When built 1818  
By whom built \_\_\_\_\_ Owners Bloomfield  
Port belonging to London Destined Voyage \_\_\_\_\_  
If Surveyed Afloat or in Dry Dock in Williams Dock

Last Survey, No. 13322 Classed \*AF. 1

Port London

REPAIRS at Present bottom stripped. The three after hoods of Elm plank renewed timbers exposed sound on each side of Copper driven in Stern Post and Deadwood, two after hoods in Starboard buttock renewed of English Oak - all the bilge Ceiling planks amidships and two planks of Ceiling above the bilges and several planks new in flats of Ceiling of Amer "Cm 31 new head & heel chocks and 5 new filling timbers in bilges - 1500 treenails renewed in both bilges - and bilges additionally thro' bottom with Copper - Caulked from the keel to the wales & sheathed with 1/4 metal on paper

Decks	<u>Good</u>	Treenails	<u>1500 new others</u>	Windlass and Capstan	<u>Good</u>
Waterways	<u>Good</u>	Breasthooks and Stemson	<u>Good</u>	Pumps	<u>Good</u>
Comings	<u>Good</u>	Transoms, Pointers, and Crutches	<u>Good</u>	Boats	<u>Good</u>
Upper Deck Beams & Fastenings	<u>Good</u>	Timbers of the Frame	<u>Good</u>	Masts, Yards, &c.	<u>Sufficient</u>
Lower Deck Beams & Fastenings	<u>Good</u>	Keelsons	<u>Good</u>	Sails	<u>Good</u>
Planksheers	<u>Good</u>	Clamps and Shells	<u>Good</u>	Anchors No. of	<u>Good</u>
Sheerstrakes	<u>Good</u>	Ceiling <u>new at bilges</u>	<u>Good</u>	Cables	<u>Good</u>
Topsides	<u>Good</u>	Rudder <u>refitted</u>	<u>Good</u>	Hawsers and Warps	<u>Good</u>
Wales	<u>Good</u>	<u>of 1/4 metal on paper</u>	<u>Good</u>	Standing & Running Rigging	<u>Good</u>
Plank (Bottom) and Counter	<u>Good</u>	<u>new Nov 1847</u>	<u>Good</u>		

General Observations and Opinion.

This Vessel is now in efficient Condition and in our opinion fit for the safe conveyance of Dry & perishable Cargoes to & from all parts of the World and may remain

The Amount of Fee £ 1 is received by me.


Certificate (if required) \_\_\_\_\_

Committee's Minute 19th Nov 1847

Character assigned A1

Special advice Ld. 1/2

Classed \*AF. 1 with

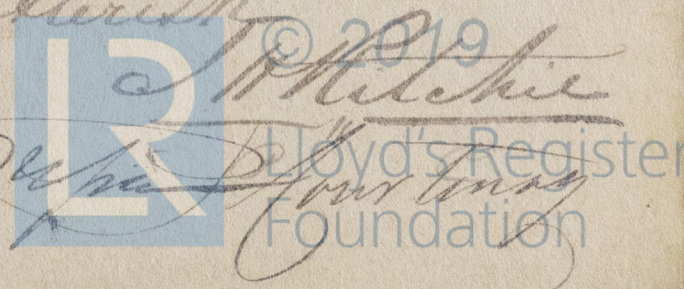

TON 624-0033