

Report of Survey for Repairs of Engines and Boilers.

No. 590 Survey held at London Date, first Survey July 19th Last Survey July 27th 1881
 Reg. Book 590 on the Machinery of the S. S. "Royal Crown" (Number of Visits 4)
 Tonnage, Gross 1844 Built at Newcastle. When built 1874
 Ditto, Net 1177 Owners Hall Bros. Port belonging to London
 Diameter of Cylinder 30" & 60" Engines made by Palmers Co. When made 1874
 Length of Stroke 33" Boilers made by Ditto When made 1874
 Pressure of Steam 62 lbs. If Surveyed Afloat or in Dry Dock Mellishall Dock. (State name of Dock.)
 Registered Horse Power 1140 Classed 90A1
 Last Survey No. 28526 Port Liverpool


Particulars of Repairs and Examination For Annual Survey (State cause of Repairs.)

Vessel placed in dry dock sea connections examined & found in good condition. Propeller and its connections sound and the tail shaft a good working fit in Stern Bush. Boilers examined. Furnaces found to be in good condition, a few patches found at bottom of vertical plates in combustion chamber which appear to be tight. Some of the screwed stays renewed in places with nuts at both ends, the original stays being riveted over. Stays in Steam space in good condition. Shell of Boilers good. Examined Safety Valves which were found to be in good condition. The compressors were screwed down to former position & Safety Valves tested under steam when they were found to blow at 62 lbs per sq. in.

General Observations, Opinion, and Recommendation:— The Boilers being now in good and safe working condition render the vessel eligible in my opinion to remain as classed than the certification B.S. 781 recorded, provided that the boilers are again examined within 12 months as per rule.

Entry or Registering Fee... £ : :
 Survey Fee (per Section 27.)... £ 2 : 2 : received by me, Geo. E. Milnerison.
 Certificate (if required) ... £ : : 17th Aug 1881
 to be sent as per margin.
 (Travelling Expenses, if any, £)

Committee's Minute Assigned
L. C. Barron 7.83
 Friday, August, 12th 1881
 Engineer Surveyor to Lloyd's Register of British & Foreign Shipping.

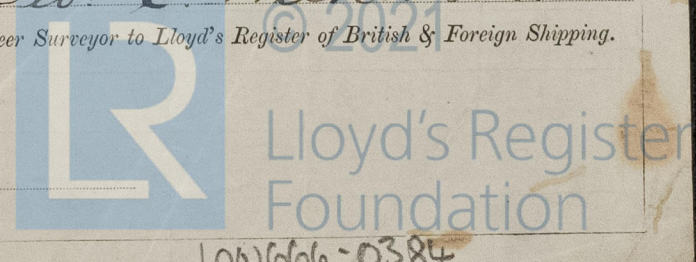

LON666-0384

This submitter that this vessel
appear eligible to be classes
BS'781 subject to annual
survey of boilers as per
Rule.

MP
8.8.81



© 2021

Lloyd's Register
Foundation