


Report of Survey for Repairs of Engines and Boilers.

No. 42381
(Received at London Office, 16.3.83)
No. in Survey held at London Date, first Survey Feb. 19th Last Survey Mar. 10th 1883.
eg. Book. 645 on the Machinery of the S. S. "Breconshire." (Number of Visits 4)
Tonnage, Gross 1902 Built at Glasgow When built 1878
Ditto, Net 1241 Owners D. J. Jenkins & Co. Port belonging to London
Diameter of Cylinder 36" & 66" Engines made by Lon. & Glas. Co. When made 1878
Length of Stroke 42" Boilers made by Ditto When made 1878
Pressure of Steam 70 lbs. If Surveyed Afloat or in Dry Dock At D. Dock Years assigned 100A1
Registered Horse Power 275 (State name of Dock.)
Last Survey No. 1 Port T.M.C. 2.79.

Particulars of Repairs and Examination According to the requirements for
(State cause of Repairs.) Special Survey No 1. Vessel placed in dry dock, sea
connections examined & found to be in good condition.
propeller & its connections sound. Tail shaft down 3/8
in Stern Bush.
Cylinders, Slides, Crank & Thrust Shafts, Air, Circu-
lating, Feed & Bilge pumps examined & found to be
in good condition. Boilers examined, a few leaks in
shell underneath have been caulked & retubed through
out. Safety valves found in good condition & tested under
steam to 70 lbs. per sq. in.

General Observations, Opinion, and Recommendation:— The machinery being now
in good & safe working condition renders the vessel eligible
in my opinion to be marked in the Register Book with
T. M. C. 3. 83.

Entry or Registering Fee... £ 1 : 10 :
(per Section 27.)
Survey Fee (per Section 28) 19/4 £ 3 : 3 :
Certificate (if required) ... £ 5 :
to be sent as per margin.
(Travelling Expenses, if any, £)
Committee's Minute Tuesday, 20th March 1883.
Assigned L.H. 3,83
received by me, L.H. 3,83
Geo. S. Wilkinson
Engineer Surveyor to Lloyd's Register of British & Foreign Shipping.

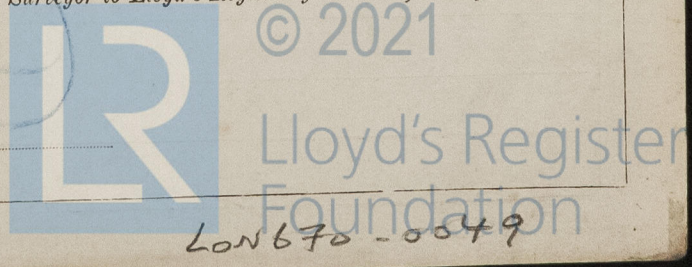

It is submitted that this vessel is
eligible to have the notification
LM 6 383 recorded

DG

14/3/83



© 2021

Lloyd's Register
Foundation

Survey for Owners of Engines and Boilers