

43745

# Report of Survey for Repairs, &c., of Engines & Boilers.

FRIDAY 10 JULY 1885

No. \_\_\_\_\_ (Received at London Office, \_\_\_\_\_)  
 No. in Reg. Book. *239* Survey held at *London* Date, first Survey *10<sup>th</sup> June* Last Survey *30 June 1885*  
 on the Machinery of the *S. S. "Penguin"* (Number of Visits *5*)  
 Tonnage, Gross *906* Built at *Dundee* When built *1876*  
 Ditto, Net *482* Owners *General Steam Co* Port belonging to *London*  
 Diameter of Cylinder *42 - 70* Engines made by *Gowley Bros* When made *1876*  
 Length of Stroke *36* Boilers made by \_\_\_\_\_ When made *1876*  
 Pressure of Steam *65* If Surveyed Afloat or in Dry Dock *Leppford Dock* Character in Register Book. *100 A1*  
 Registered Horse Power *220* (State name of Dock.)  
 Last Survey No. \_\_\_\_\_ Port *L.M.C. 4.50*

Particulars of Repairs and Examination *Special Survey*  
 (State clearly the cause of Repairs if any, and, in detail, the nature and extent of Examinations and subsequent Repairs. Repairs on account of Damage should be separated from Repairs due to other causes. State also the dates and initials of any letters respecting this case.)


*Examined sea-cocks & connections & found them good*  
*Examined 2 main boilers + 2 steam domes. Found them in a good condition. Several patches in lower parts of boilers have been renewed*  
*Examined safety valves, slide valves, both cylinders, pumps & crankshaft & found them in a good condition*  
*The brass rings of the Thrust block have been renewed.*  
*The safety valves were found to blow at 62 lbs.*

General Observations, Opinion, and Recommendation:— *The machinery of this vessel appears to be in a safe working condition & is in my opinion eligible to have the notification L.M.C. 7.85 recorded in the Register Book.*  
 (State clearly what alteration, if any, is suggested to be made in the existing notification of the vessel's machinery in the Register Book, consequent upon this survey.)

Office or Registration Fee (per Sec. 27) £ : :  
 Survey Fee (per Section 28) £ *4 : 4* -  
 Special Damage Fee (per Section 28) £ : :  
 \*Certificate (if required) £ : :  
 Travelling Expenses (if chargeable) £ : :  
 received by me, *J.B.W.*  
*20/7/1885*

*C. W. Stoneyer*  
 Engineer Surveyor to Lloyd's Register of British and Foreign Shipping.

Committee's Minute \_\_\_\_\_  
 Assigned *M.C. 7.85*  
 TUESDAY 14 JULY 1885

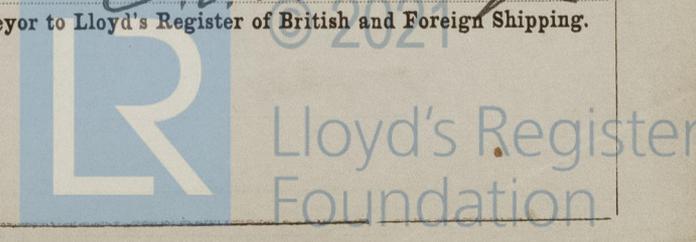

Insert Character of Ship and Machinery precisely as in the Register Book.

It is submitted that this vessel is eligible to have the notification LM B 6. 85 recorded the boilers being subject to survey as per Rule

D.P.  
9/7/85.

*[Faint handwritten text, likely bleed-through from the reverse side of the page]*

*[Faint printed text and markings, likely bleed-through from the reverse side of the page]*

