"White Adder" 1862

24957 LON

13

721

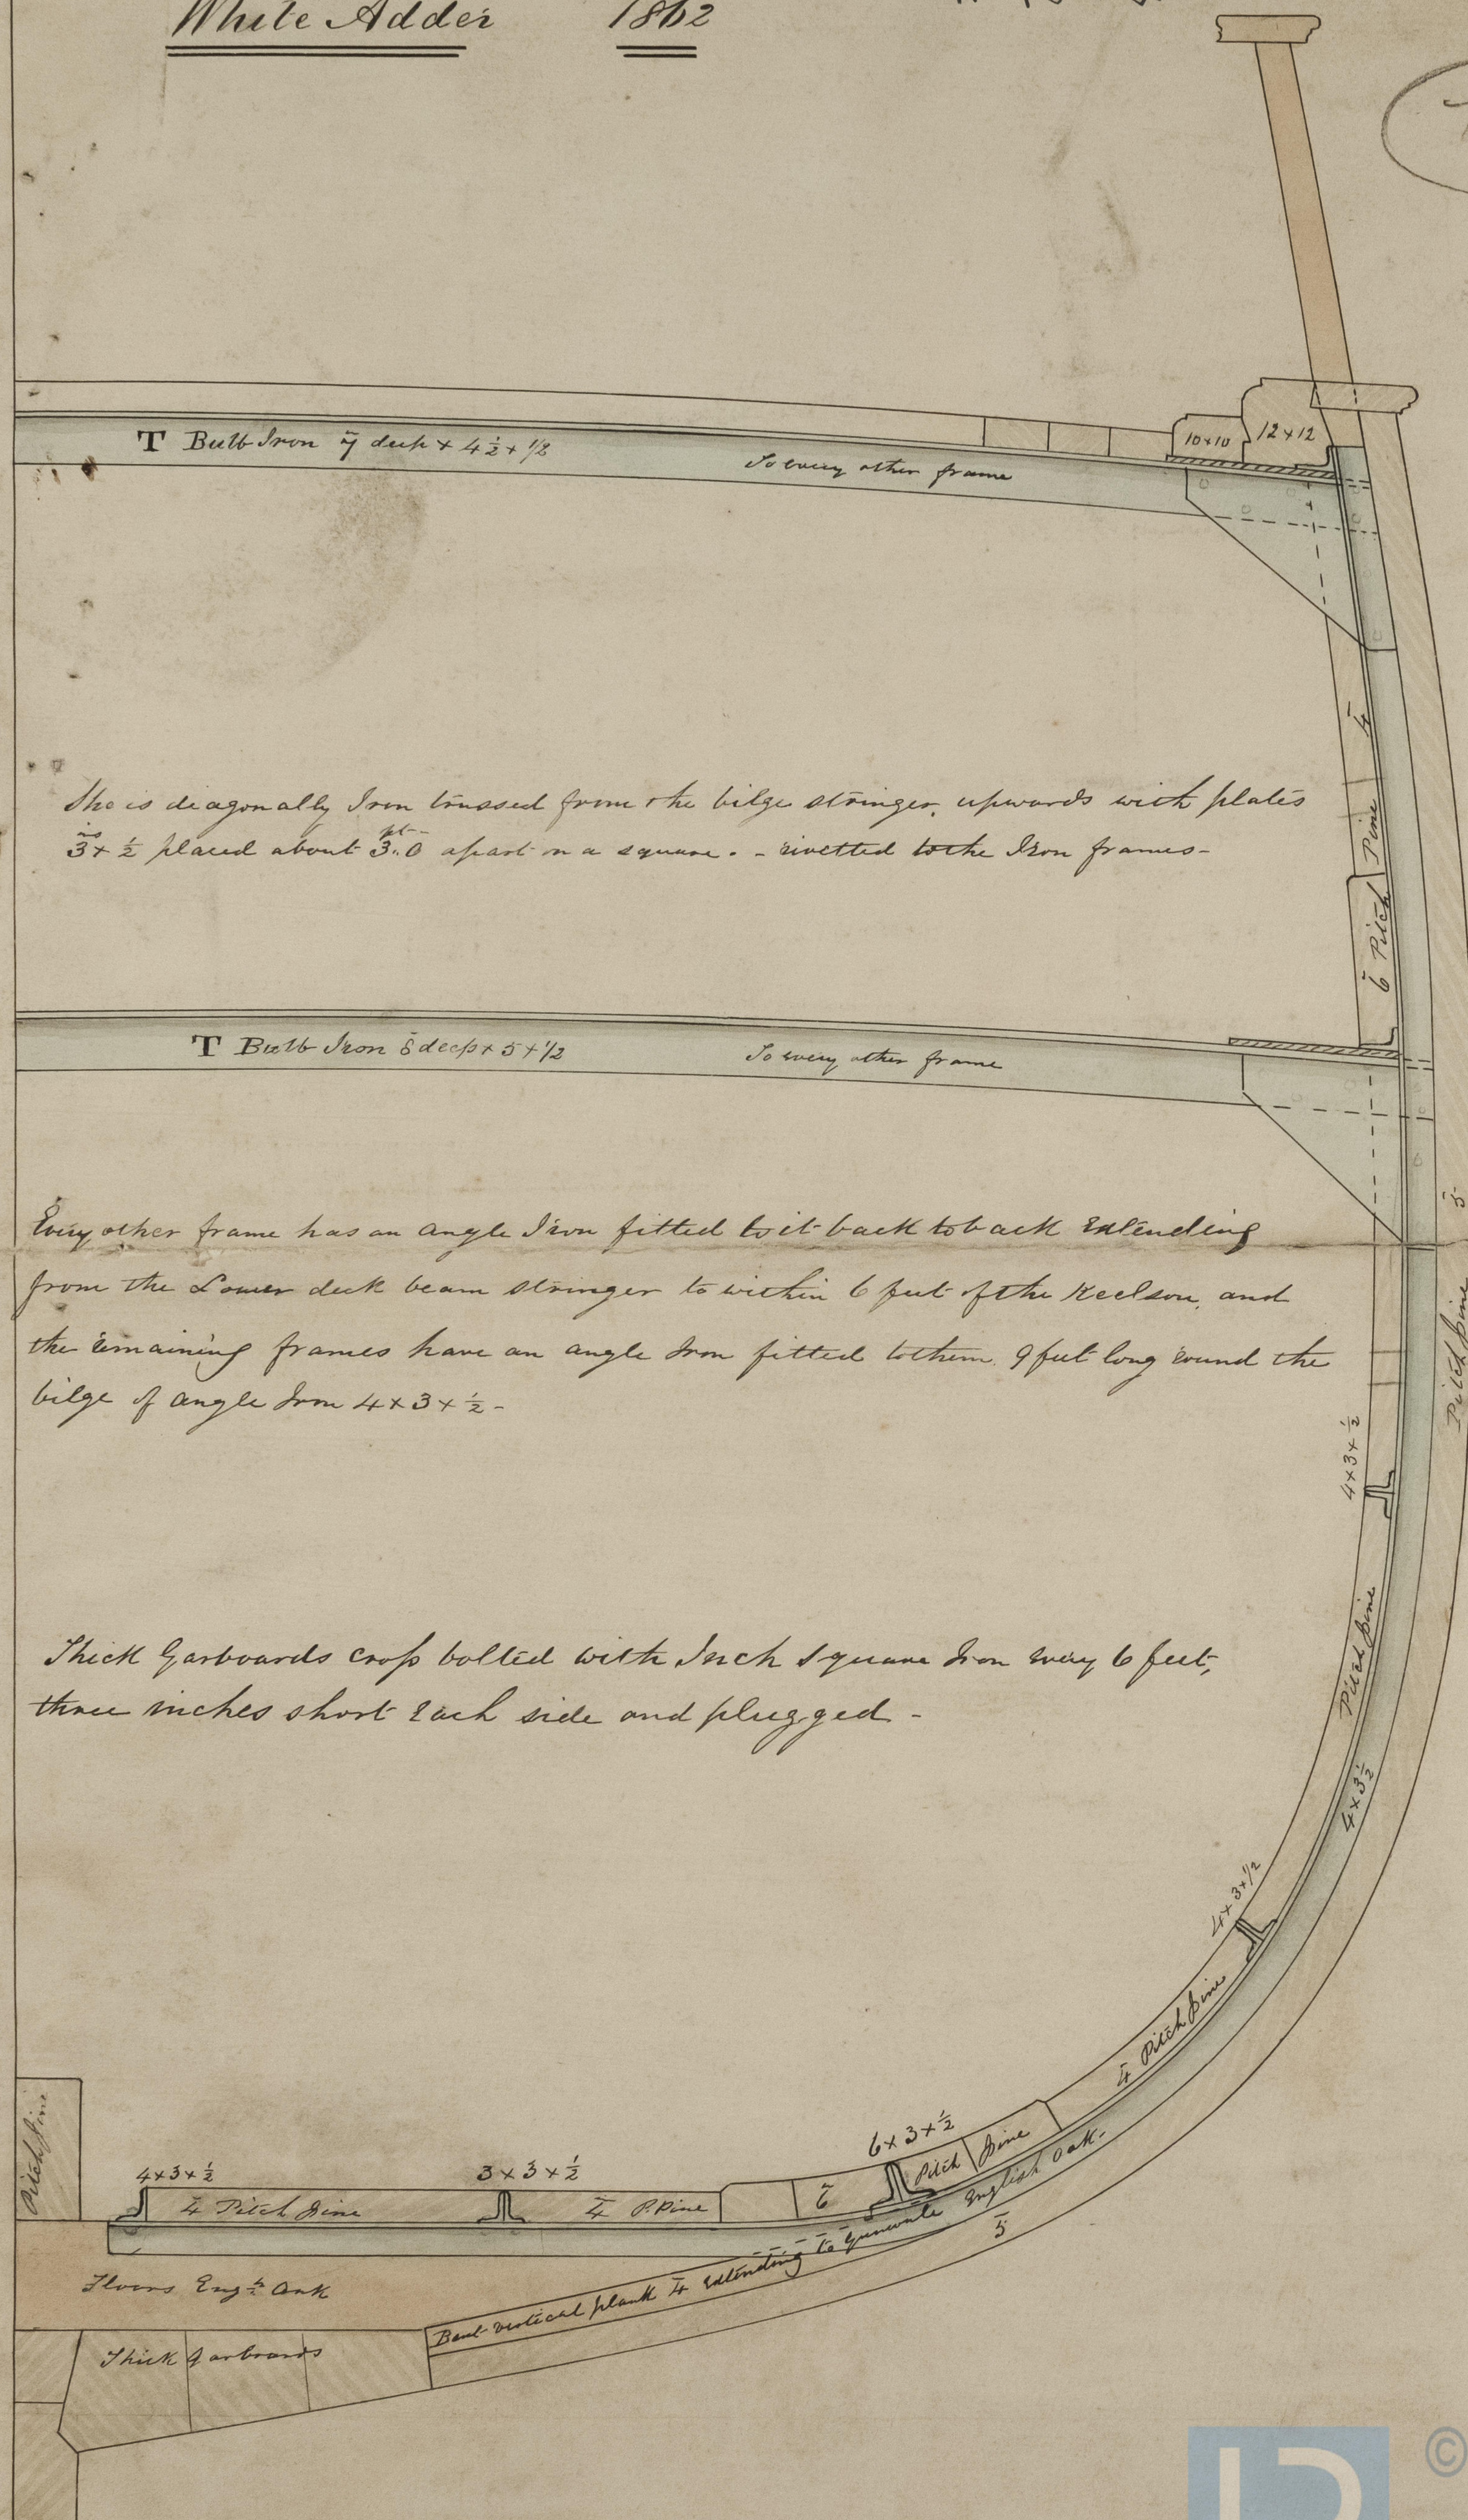

She is diagonally Iron trussed from the bilge stringer upwards with plates 3 in × ½ placed about 3 ft. 0 apart on a square -- rivetted to the Iron frames -

Every other frame has an angle Iron fitted to it back to back extending from the Lower deck beam stringer to within 6 feet of the Keelson, and the remaining frames have an angle Iron fitted to them 9 feet long round the bilge of angle Iron 4 × 3 × ½ -

Thick Garboards crop bolted with Inch square Iron every 6 feet, three inches short each side and plugged -

© 2021 Lloyd's Register Foundation

LON721.0013