

Owners *A. M. S. S. Meat Transports Ltd* Port belonging to *London*
Electric Light Installation fitted by *Harland & Wolff Ltd.* Contract No. *517* When

THE GOVAN SHIPBUILDING YARD,
GLASGOW.
DIESEL ENGINE WORKS,
FINNIESTON, GLASGOW.
DIESEL ENGINE WORKS,
SCOTSTOUN, GLASGOW.
SHIPBUILDING YARD,
GREENOCK.
SHIP REPAIRING & ENGINEERING WORKS,
BOOTLE, LIVERPOOL
AND
SOUTHAMPTON.
12 COCKSPUR STREET,
LONDON, S.W.1.

HARLAND & WOLFF LTD

TELEGRAMS: HARLANDIC.BELFAST.
TELEPHONE: 3339. EDO

*Shipbuilding & Engineering Works,
Belfast.*

11th August 1924

ALL COMMUNICATIONS TO BE ADDRESSED TO THE COMPANY.

Ref. ED/DO.

The Surveyors,
Lloyd's Register of Shipping,
BELFAST.

Dear Sirs,


No. 517 M.V. "Lochmonar".

We are in receipt of your letter of the 8th inst. regarding the Electric Light and Power report on the above vessel and note your remarks.

With reference to cable on Circuit No. XXVI supplying cooking boxes Nos. 7 and 9, while it appears from the above report that this cable is overloaded, this is not so, as the load under working conditions is very much smaller than the total connected current given. The load is made up of the following items, of which it is improbable that there will be more than a total of 4 or 5 in operation at the one time:-

- 5 - 5-gallon water boilers
- 2 - 7-gallon " "
- 1 - 10-gallon " boiler
- 1 - hot press
- 2 - blowers
- 1 - oil fuel heater

In addition, the cable is fully protected by double pole fuses

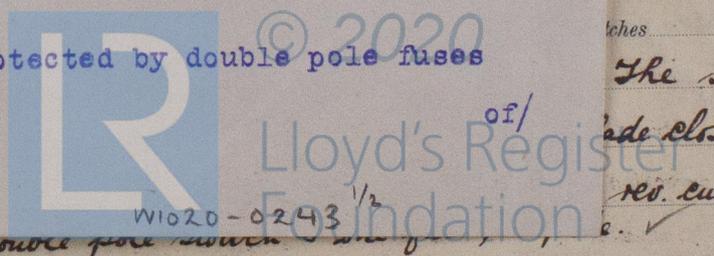

Each outgoing circuit provided with a double pole switch
Instruments on main switchboard 5 ammeters 2 voltmeters arranged synchronising devices for Earth Testing state what means are provided at the main switchboard for indicating the state of the insulation of the system

11.8.1924.

-2-

of 150 amperes capacity, so that it would be impossible to overload the cable to any serious degree.

We would also confirm that earth lamps are fitted on the main switchboard.

Yours truly,
For HARLAND AND WOLFF, LIMITED.



© 2020

Lloyd's Register
Foundation
W1020-0243^{2/2}
& No. cut

Each outgoing circuit provided with a double pole switch + one fuse per pole.
Instruments on main switchboard *5* ammeters *2* voltmeters arranged *synchronising device* for p

Earth Testing, state what means are provided at the main switchboard for indicating the state of the insulation of the system *Earth*

1705
1800

1801 HAVING THE ... LIMITED

...

...

-5-

1801



© 2020
Lloyd's Register
Foundation

Each
Instru
open

File
010