

BF.4/496

COPY.

L7215.

From STEWARTS and LLOYDS, LIMITED, COATBRIDGE.

To MESSRS RICHARDSONS WESTGARTH & CO. LIMITED. ORDER OF  
14TH JUNE 1926. NO. H/15540. ENGINE 2658

LAPD. STEEL TUBE  $4\frac{1}{2}$ " O/D X  $5/16$ " THICK:

1 HORSE SHOE EXPANSION BEND.

3FT.8" OVER FLANGES.

3FT.9" OUTREACH.

11" SPACE CENTRES.

1FT.2" X 1FT. RADII.

FACED LENGTH 10FT.10"

BOTH ENDS FLANGED.

WITH MILD STEEL FLANGES WELDED ON WITH A  
FILLET AT BACK, FACED PLAIN AND TURNED  
ON EDGE BUT NOT DRILLED.


FLANGES  $9\frac{1}{2}$ " DIAR. X  $1\frac{1}{4}$ " THICK.

SUITABLE FOR A WORKING PRESSURE OF 180 LBS  
PER SQUARE INCH.

TESTED TO 540 LBS PER SQUARE INCH.

TO LLOYDS TESTS REQUIREMENTS AND INSPECTION.

ENGINE NO. 2658

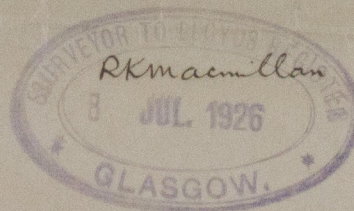

© 2020

Lloyd's Register  
Foundation

W1075-0180