


REPORT ON ELECTRICAL EQUIPMENT.

(OTHER THAN FOR THE PROPULSION OF THE VESSEL)

29 NOV 1935

Date of writing Report 19... When handed in at Local Office **28 NOV 1935** Port of **HULL**
 No. in Survey held at **Hull** Date, First Survey **8/11/35** Last Survey **18/11/1935**
 Reg. Book. (Number of Visits... **3**)
 on the **Steam Trawler "Cape Corrientes"** Tons { Gross
 Net
 Built at **Selly.** By whom built **Cochrane & Sons Ltd.** Yard No. **1146** When built **1935**
 Owners Port belonging to **Hull.**
 Electric Light Installation fitted by **Wm Broady & Son** Contract No. When fitted **1935**
 Is the Vessel fitted for carrying Petroleum in bulk **No.**

System of Distribution **Two Wire** ✓
Pressure of supply for Lighting **100** ✓ volts, **Heating** **100** ✓ volts, **Power** ✓ volts.
Direct or Alternating Current, Lighting **Direct** ✓ **Power** ✓
 If alternating current system, state frequency of periods per second ✓
 Has the **Automatic Governor** been tested and found efficient when the whole load is suddenly thrown on or off **Yes** ✓
Generators, do they comply with the requirements regarding temperature rise **Yes** ✓, are they compound wound **Yes** ✓
 are they over compounded 5 per cent. **Yes** ✓, if not compound wound state distance between each generator ✓
 Where more than one generator is fitted are they arranged to run in parallel ✓, is an adjustable regulating resistance fitted in series with each shunt field **Yes** ✓ Have certificates of test results for machines under 100 kw. been submitted and approved ✓ Have machines over 100 kw. been inspected by the Surveyors during manufacture and testing ✓
 Are all terminals accessible, clearly marked, and furnished with sockets **Yes** ✓, are they so spaced or shielded that they cannot be accidentally earthed, short circuited, or touched **Yes** ✓ Are the lubricating arrangements of the generators as per Rule **Yes** ✓
Position of Generators **Starb. side of engine room.** ✓, is the ventilation in way of the generators satisfactory **Yes** ✓ are they clear of all inflammable material **Yes** ✓ if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the generators ✓ and ✓
 are the generators protected from mechanical injury and damage from water, steam or oil **Yes** ✓, are their axes of rotation fore and aft **Yes** ✓
Earthing, are the bedplates and frames of the generating plant efficiently earthed **Yes** ✓ are the prime movers and their respective generators in metallic contact **Yes, direct connected** **Main Switch Boards**, where placed **Beside generator in engine room.** ✓
 If the generators and main switchboard are not placed in the same compartment, is each generator provided with a fuse on each insulated pole as near as possible to the terminals of the generator, additional to that provided on the main switchboard ✓
Switchboards, are they placed in accessible positions, free from inflammable gases and acid fumes **Yes** ✓, are they protected from mechanical injury and damage from water, steam or oil **Yes** ✓, if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the switchboards ✓ and ✓, are they constructed wholly of durable, non-ignitable non-absorbent materials **Yes** ✓, is all insulation of high dielectric strength and of permanently high insulation resistance **Yes** ✓, is it of an approved type **Yes** ✓, if semi-insulating material is used, are all conducting parts insulated from the slab with mica or micanite or other non-hygroscopic insulating material, and the slab similarly insulated from its framework **Yes** ✓, is the non-hygroscopic insulating material of an approved type **Yes** ✓, and is the frame effectively earthed **Yes** ✓. Are the fittings as per Rule regarding:— spacing or shielding of live parts **Yes** ✓, accessibility of all parts **Yes** ✓, absence of fuses on back of board **Yes** ✓, temperature rise of omnibus bars ✓, individual fuses to voltmeter, pilot or earth lamp **Yes** ✓, are moving parts of switches alive in the "off" position **No** ✓ are all screws and nuts securing connections effectively locked **Yes** ✓ are any fuses fitted on the live side of switches **No** ✓
Main Switchgear, description of switchgear for each generator and each outgoing circuit, and arrangement of equalizer switches **D.P. linked switch for generator. Outgoing circuits controlled by S.P. switches.** ✓
 Are turbine driven generators fitted with emergency trip switch as per rule ✓ Are cupboards or compartments containing switchboards composed of fire-resisting material or lined with approved material ✓ **Instruments** on main switchboard **one** ammeter **one** voltmeter ✓ synchronising device for paralleling purposes. For compound machines is the ammeter connected on the opposite pole to equaliser connection ✓
Earth Testing, state what means are provided at the main switchboard for indicating the state of the insulation of the system **Earth lamp, with separate switches.** ✓ **Switches, Circuit Breakers and Fusible Cut-outs**, do these comply with the requirements of the Rules **Yes** ✓ are the fusible cutouts of an approved type **Yes** ✓ have the reversed

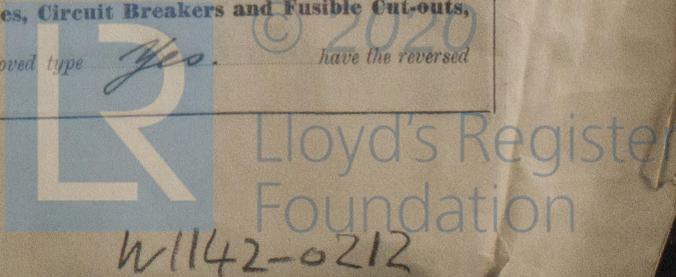

current protection devices been tested under working conditions **Joint Boxes, Section and Distribution Boards**, is the construction, protection, insulation, material, and position of these as per rule Yes

Cables: Single, twin, concentric, or multicore Twin are the cables insulated and protected as per Tables IV, V, X or XI of the Rules Yes

If the cables are insulated otherwise than as per Rule, are they of an approved type **Fall of Pressure**, state maximum between bus bars and any point of the installation under maximum load nil.

Cable Sockets, are the ends of all cables having a sectional area of 0.04 square inch and above provided with soldering sockets Yes

Paper Insulated and Varnished Cambric Insulated Cables. If conductors are paper or varnished cambric insulated, is the dielectric at the exposed ends of the conductor protected from moisture by being suitably sealed with insulating compound or waterproof insulating tape **Cable Runs**, are the cables fixed as far as possible in accessible positions not exposed to drip or accumulation of water or oil, or to high temperature from boilers, steam pipes, uptakes or other hot objects, or to avoidable risk of mechanical damage Yes Are cables in machinery spaces, galleys, laundries, bathrooms and lavatories lead covered or run in conduit L.C. & A.

Support and Protection of Cables, state how the cables are supported and protected L.C. cables with brass clips. Armoured cables with G.I. clips.

If cables are run in wood casings, are the casings and caps secured by screws are the cap screws of brass are the cables run in separate grooves If armoured and lead covered cables are secured by metal clips, are the clips spaced as per Table VIII Yes

Refrigerated Chambers, are the cables and fittings in accordance with the special requirements

Joints in Cables, state if any, and how made, insulated, and protected No joints.

Watertight Glands and Deck Tubes, are all cables passing through decks and watertight bulkheads provided with deck tubes or watertight glands Yes Bushes in Beams and Non-watertight Partitions, where unarmoured cables pass through beams and non-watertight partitions, are the holes efficiently bushed Yes state the material of which the bushes are made Lead.

Earthing Connections, state what earthing connections are fitted and their respective sectional areas are their connections made as per Rule

Alternative Lighting, are the groups of lights in the propelling machinery space arranged as per Rule Yes **Emergency Supply**, state position and method of control of the emergency supply and how the generator is driven

Navigation Lamps, are these separately wired Yes controlled by separate switch and separate fuses Yes are the fuses double pole Yes are the switches and fuses grouped in a position accessible only to the officers on watch Yes

has each navigation lamp an automatic indicator as per Rule **Secondary Batteries**, are they constructed and fitted as per Rule

Fittings, are all fittings on weather decks, in stokeholds and engine rooms and wherever exposed to drip or condensed moisture, watertight Yes are any fittings placed in spaces in which goods are liable to be stacked in close proximity to them; if so, how are they protected Yes. Fitted with brass guards & w.t. fittings.

are any fittings placed in spaces where inflammable or explosive dust or gases are liable to be present, if so, how are they protected None how are the cables led

where are the controlling switches situated

are all fittings suitably ventilated are all switches and lampholders constructed wholly of non-ignitable, non-absorbent materials

Heating and Cooking Appliances, are they constructed and fitted as per Rule Yes are air heaters constructed and fitted as per Rule

Searchlight Lamps, No. of whether fixed or portable are their fittings as per Rule

Arc Lamps, other than searchlight lamps, No. of are their live parts insulated from the frame or case are their fittings as per Rule

Motors, are their working parts readily accessible are the coils self-contained and readily removable for replacement are the brushes, brush holders, terminals and lubricating arrangements as per Rule are the motors placed in well-ventilated compartments in which inflammable gases cannot accumulate and clear of all inflammable material are they protected from mechanical injury and damage from water, steam or oil are their axes of rotation fore and aft if situated near unprotected woodwork or other combustible material, are the motors of the totally enclosed, pipe ventilated, forced draught, drip or flame proof type if not of this type, state distance of the combustible material horizontally or vertically above the motors and

have machines of over 100 BHP been inspected by the Surveyors during manufacture and testing **Control Gear and Resistances**, are the generator field and motor speed regulators, starters and controllers constructed and fitted as per Rule **Lightning Conductors**, where lightning conductors are required, are these fitted as per Rule **Ships carrying Oil having a Flash Point less than 150° F.** Have the special requirements of the Rules been complied with regarding switches, joint boxes, section and distribution boards, protection of cables, method of distribution, lead of cables, lights and fittings are all fuses of the filled cartridge type are they of an approved type

If portable lamps for use in dangerous spaces are supplied, are they of a self-contained, battery-fed type approved by the Home Office

Spare Gear, if the vessel is for open sea service have spares been supplied as per Rule

PARTICULARS OF GENERATING PLANT.									
DESCRIPTION OF GENERATOR	No. of	RATED AT				DRIVEN BY	WHERE DRIVEN BY AN INTERNAL COMBUSTION ENGINE		
		Kilowatts	Volts	Amps.	Revs. per Min.		Fuel Used.	Flash Point of Fuel.	
MAIN	One	8	100	80	350	Steam Engine			
AUXILIARY									
EMERGENCY									
ROTARY TRANSFORMER									

DESCRIPTION	CONDUCTORS		COMPOSITION OF STRAND		TOTAL MAXIMUM CURRENT AMPERES		Approximate Length (Lead and Return) Feet.	Insulated with	HOW PROTECTED
	No. per Pole	Total Nominal Area per Pole Sq. Ins.	No.	Diameter	Circuits	Rule			
MAIN GENERATOR	1	.060	19	.064	79	83	-	V.I.R.	L.C. Armoured.
EQUALISER CONNECTIONS									
AUXILIARY GENERATOR									
EMERGENCY GENERATOR									
ROTARY TRANSFORMER MOTOR GENERATOR									
ENGINE ROOM	1	.003	3	.036	3.5	12	20	"	"
BOILER ROOM	1	.003	3	.036	1.5	12	40	"	"
AUXILIARY SWITCHBOARDS									
ACCOMMODATION Midship	1	.0225	7	.064	12	46	150	"	"
" Fore	1	.0045	7	.029	7	18.2	250	"	"
" aft	1	.007	7	.036	12	24	30	"	"
Fishroom Circuit	1	.007	7	.036	6	24	250	"	"
Navigation Main	1	.007	7	.036	6	24	150	"	"
WIRELESS	1	.010	7	.044	10	31	150	"	"
SEARCHLIGHT									
MASTHEAD LIGHT	1	.003	3	.036	1	12	150	"	"
SIDE LIGHTS	1	.003	3	.036	2	12	30	"	L.C.
COMPASS LIGHTS									
POOP LIGHTS									
CARGO LIGHTS									
ARC LAMPS									
HEATERS	1	.007	7	.036	10	24	30	"	L.C. & Armoured

DESCRIPTION	No. of Motors	CONDUCTORS		COMPOSITION OF STRAND		TOTAL MAXIMUM CURRENT AMPERES		Approximate Length (Lead and Return) Feet.	Insulated with	HOW PROTECTED
		No. Per Pole	Total Nominal Area per Pole Sq. Ins.	No.	Diameter	In Circuit	Rule			
BALLAST PUMP										
MAIN BILGE LINE PUMPS										
GENERAL SERVICE PUMP										
EMERGENCY BILGE PUMP										
SANITARY PUMP										
CIRC. SEA WATER PUMPS										
CIRC. FRESH WATER PUMPS										
AIR COMPRESSOR										
FRESH WATER PUMP										
ENGINE TURNING GEAR										
ENGINE REVERSING GEAR										
LUBRICATING OIL PUMPS										
OIL FUEL TRANSFER PUMP										
WINDLASS										
WINCHES, FORWARD										
WINCHES, AFT										
STEERING GEAR—										
(a) MOTOR GENERATOR										
(b) MAIN MOTOR										
WORKSHOP MOTOR										
VENTILATING FANS										

All Conductors are of annealed copper conforming to British Standard Specification No. 7 (or International Electro-technical Commission Publication No. 28).

The Insulated Conductors are guaranteed to withstand the immersion and resistance tests specified in the Rules.

The foregoing is a correct description.

WM BROADY & SON
ENGLISH STREET
HULL.

Electrical Engineers.

Date 23-11-35.

COMPASSES.

Distance between electric generators or motors and standard compass 70 ft.

Distance between electric generators or motors and steering compass "

The nearest cables to the compasses are as follows :-

A cable carrying .5 Ampères 7 feet from standard compass 7 feet from steering compass.

A cable carrying ✓ Ampères feet from standard compass feet from steering compass.

A cable carrying ✓ Ampères feet from standard compass feet from steering compass.

Have the compasses been adjusted with and without the electric installation at work at full power Yes

Has the effect of switching on and off circuits, motors and other electro-magnetic apparatus within the vicinity of the compasses been noted Yes

The maximum deviation due to electric currents was found to be no degrees on any course in the case of the standard compass, and ✓ degrees on ✓ course in the case of the steering compass.

FOR COCHRANE & SONS, LTD.

J. C. Mans

Builder's Signature.

Date 26 NOV 1935

Is this installation a duplicate of a previous case No If so, state name of vessel ✓

General Remarks (State quality of workmanship, opinions as to class, &c.)

The electrical installation of this vessel has been fitted on board under Special Survey, tried under working conditions, and found satisfactory. It is eligible in my opinion to have record of "Electric light."

Noted
J.Y.
2/12/35.

Total Capacity of Generators 8 Kilowatts.

The amount of Fee ... E.L. £ 4 : 0 :

When applied for,

28 NOV 1935

When received,

9.12.35

Travelling Expenses (if any) £ :

A.W.B. Edwards
Surveyor to Lloyd's Register of Shipping.

Committee's Minute TUE. 3 DEC 1935

Assigned

See minute
on J.E. Rpt.



© 2020

Lloyd's Register
Foundation

ENCLOSURE
NO. 834

2m. 524. - Transfer.
The Surveyors are requested not to write on or below the space for Committee's Minute.