


PART SECTION LOOKING
FORWARD ON B&P T8.

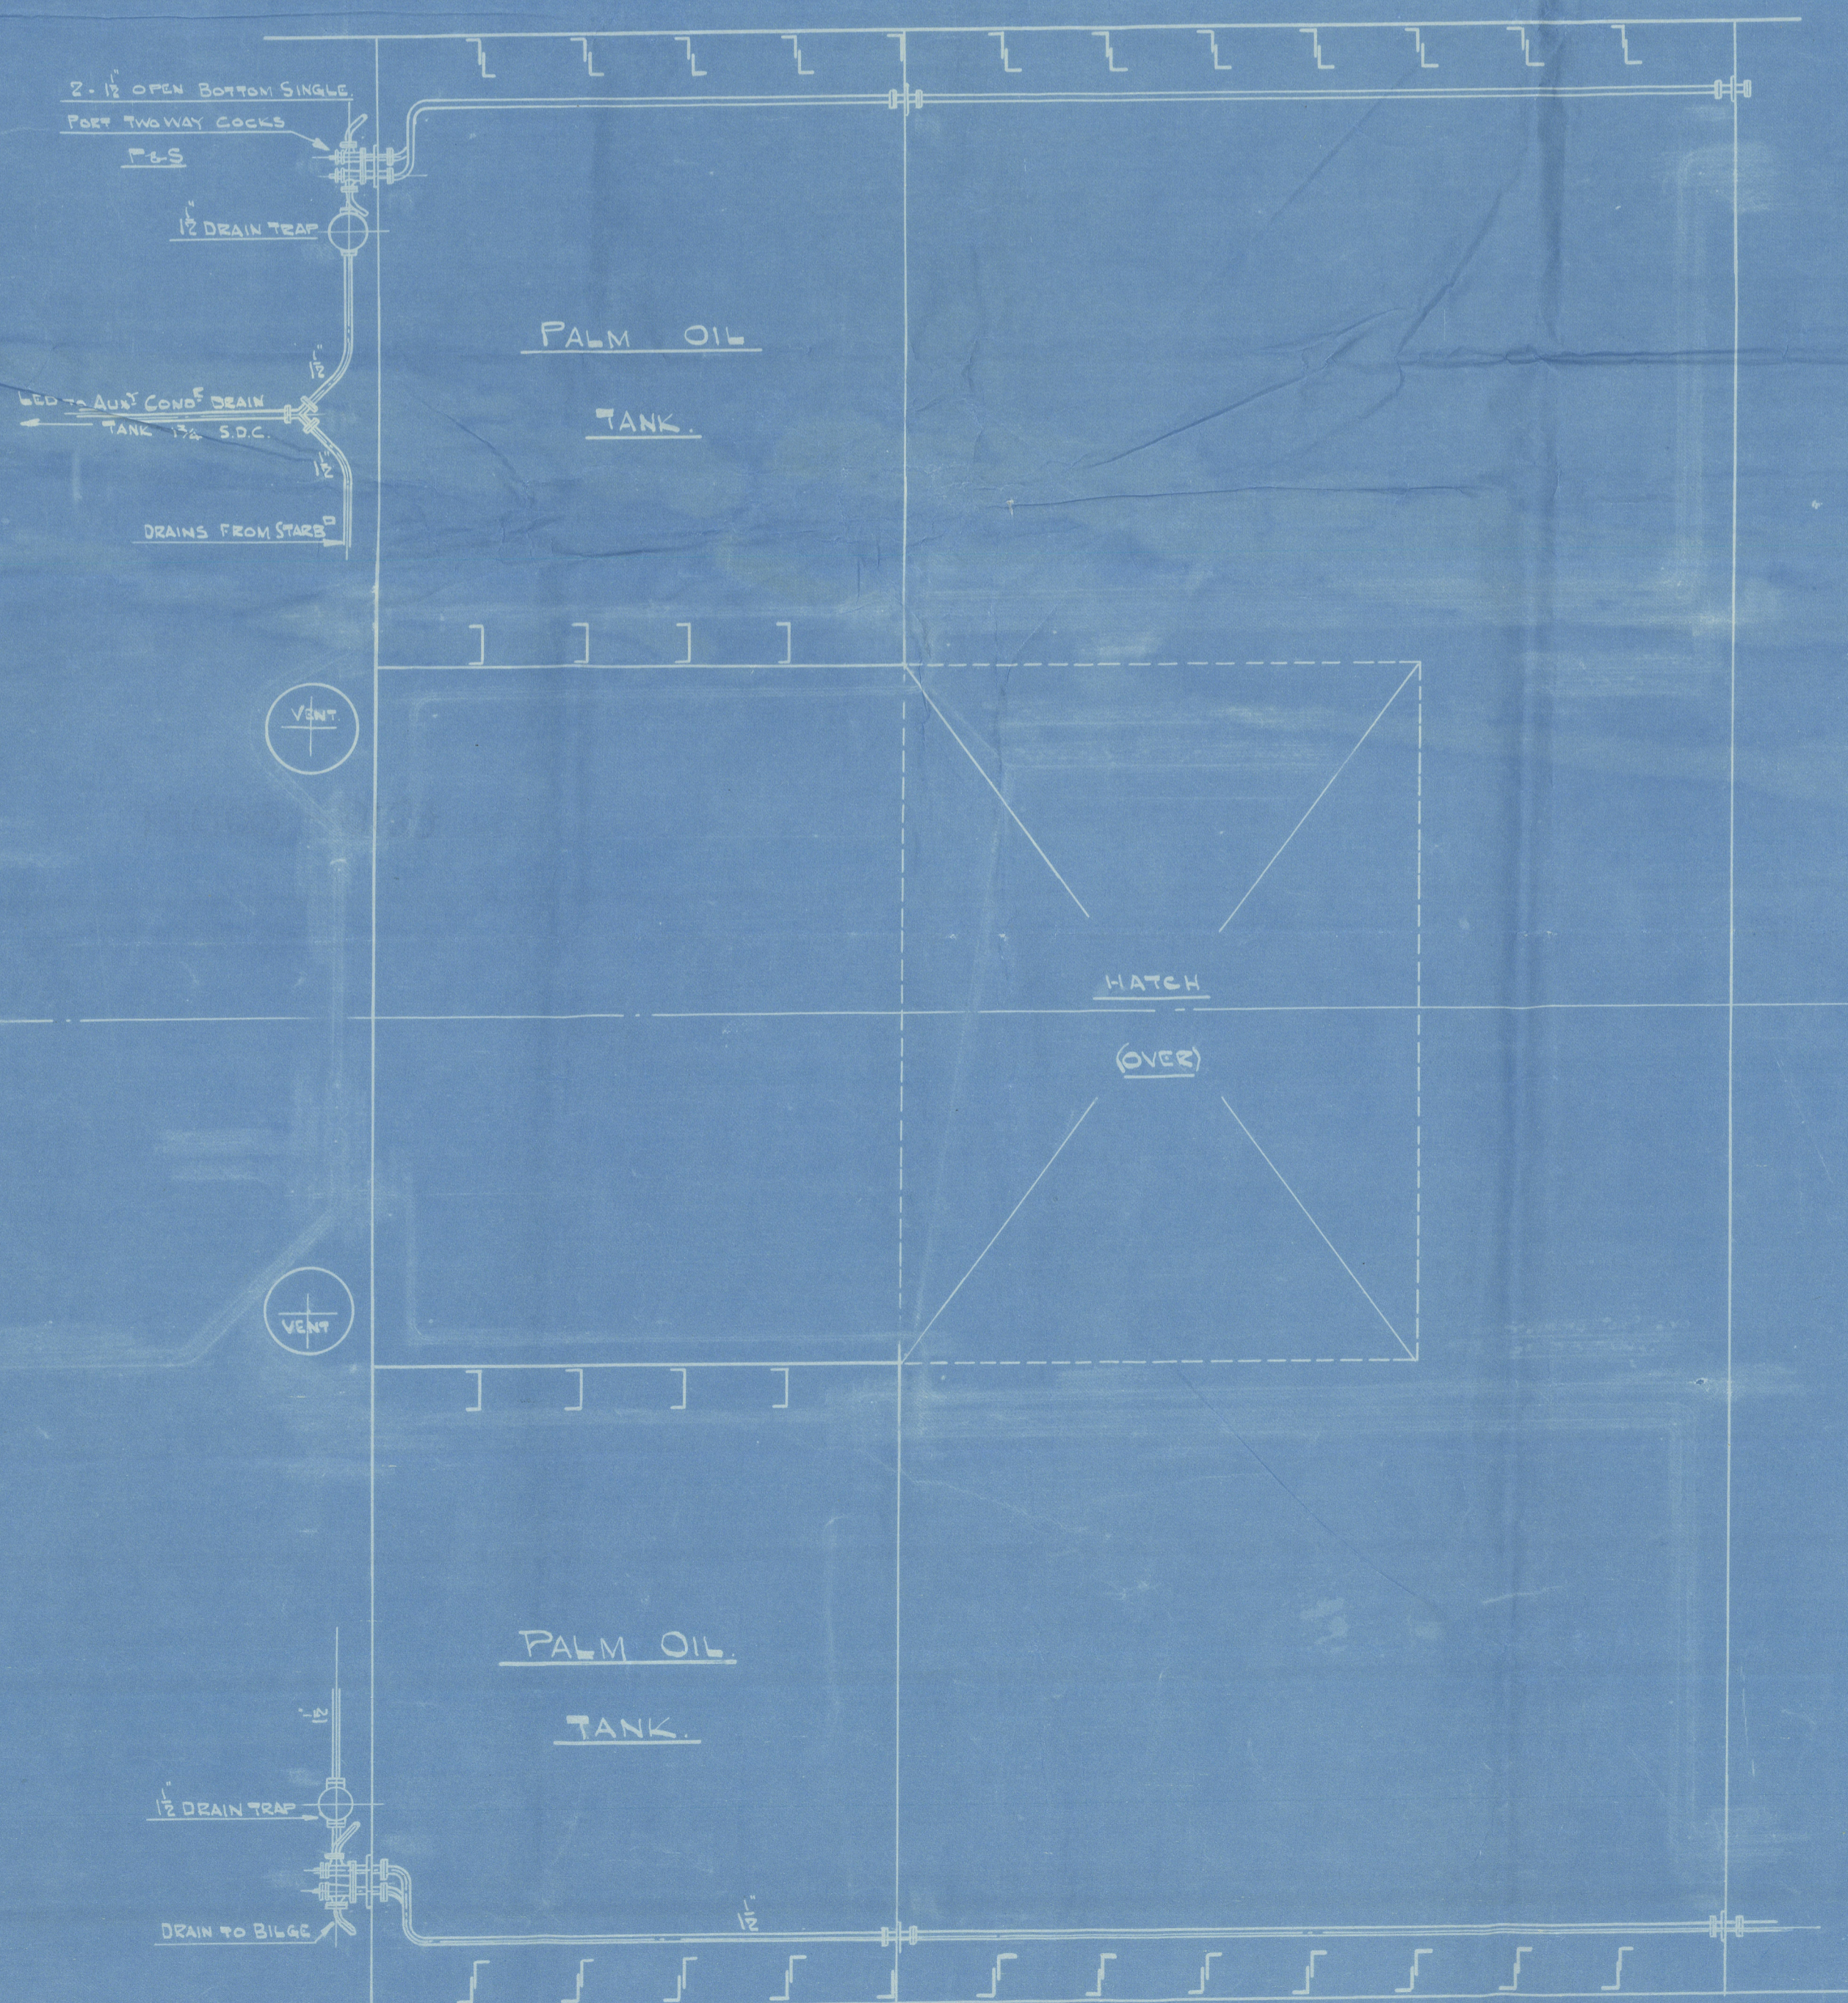

PIPES

BORES AS MARKED ON DRAWING. ALL PIPES IN
BUNKERS & OIL TANKS TO BE OF SOLID DRAWN STEEL
WITH SCREWED FLANGES & TESTED TO 540 LBS/SQ IN
ALL PIPES IN MACHINERY SPACES TO BE SOLID
DRAWN COPPER TESTED TO 60 LBS/SQ IN

S/S NEW COLUMBIA

ARRANGEMENT OF DRAINS FROM PALM OIL TANK

SCALE - 1/4" = 1 FOOT.