

(LLOYD'S REGISTER.)

VESSELS OF 100 TONS AND UPWARDS.

G.R. 130.
Lloyd's Register.

These particulars are supplied by the Registrar General of Shipping and Seamen for the sole use of Lloyd's Register of British and Foreign Shipping.

Signal Letters (if any) **K.W.P.D.**

Official Number.	Name of Ship.	No., Date, and Port of Registry.
160,179.	Virgilia.	38/1927 Glasgow.

No., Date, and Port of Previous Registry (if any). -----																									
Whether British or Foreign Built.	Whether a Sailing or Steam Ship; and if a Steam Ship how propelled.	Where Built.	When Built.	Name and Address of Builders.																					
British	Steam Ship Single Screw.	Greenock	1927	The Greenock Dockyard Coy. Ld. Main Street, Greenock.																					
Number of Decks	Two	Length from fore part of stem, under the bowsprit, to the aft side of the head of the stern post	Feet.	Tenths																					
Number of Masts	Two				410	3																			
Rigged	Schooner				Length at quarter of depth from top of weather deck at side amidships to bottom of keel	410	0																		
Stern	Elliptical							Main breadth to outside of plank	54	5															
Build	Clincher										Depth in hold from tonnage deck to ceiling at midships ...	30	1												
Galleries	-----													Depth in hold from upper deck to ceiling at midships, in the case of three decks and upwards	30	0									
Head	-----																Depth from top of beam amidships to top of keel	30	2						
Framework and description of vessel	Steel Oil Carrier																			Round of beam	1	1			
Number of Bulkheads	16																						Length of engine room, if any	60	0
Number of water ballast tanks, and their capacity in tons	5 510.5 tons.																								

PARTICULARS OF DISPLACEMENT.

Total to quarter the depth from weather deck at side amidships to bottom of keel **11,000** Tons. Ditto per inch immersion at same depth **44.2** Tons.

PARTICULARS OF PROPELLING ENGINES, &c. (if any).

No. of sets of Engines.	Description of Engines.	Whether British or Foreign made.	When made.	Name and address of makers.	Reciprocating Engines.		Rotary Engines.	N. H. P. I. H. P. Speed of Ship.
					No. and Diameter of Cylinders in each set.	Length of Stroke.		
One	Vertical Direct Acting Triple Expansion	Engines.	Engines.	Engines.	Three 25"	48"	-----	266
No. of Shafts.	Particulars of Boilers.	Boilers.	Boilers.	Boilers.	43½"		-----	2300
One	Description: Multi tubular Number: Three Iron or Steel: Steel Loaded Pressure: 210 lbs.	British	1927	John G. Kincaid & Co., Ltd., Greenock.	74"			11½ knots

PARTICULARS OF TONNAGE.

GROSS TONNAGE.		No. of Tons.	DEDUCTIONS ALLOWED.		No. of Tons.
Under Tonnage Deck		5157.06		On account of space required for propelling power	1831.41
Space or spaces between Decks				On account of spaces occupied by Seamen or Apprentices, and appropriated to their use, and kept free from goods or stores of every kind, not being the personal property of the Crew	
Water Trunk		17.18		These spaces are the following, viz.:— Houses in forecastle and poop and Round Houses on Bridge. The Number of seamen and apprentices for whom accommodation is certified - 51	261.15
Forecastle		104.68			
Bridge space		59.06			
Poop or Deck		108.83			
Side Houses					
Deck Houses		114.15			
Chart House		10.14			
Spaces for machinery, and light, and air, under Section 78 (2) of the Merchant Shipping Act, 1894		152.05			
Excess of Hatchways					
Gross Tonnage		5723.15	Cubic Metres		
Deductions, as per Contra		2308.56		6533.22	
Register Tonnage		3414.59		9663.29	

NOTE 1.—The tonnage of the engine room spaces below the Upper Deck is **593.29** tons, and the tonnage of the total spaces framed in above the Upper Deck for propelling machinery and for light and air is **159.57** tons.

NOTE 2.—The undermentioned spaces above the Upper Deck are not included in the cubical contents forming the ship's register tonnage.

Open space A.E. forecastle	6.1 feet in length	part hatchways.	
" F.E. Bridge	4.7 "	" "	15.88 Tons
" In Bridge	28.1 "	" "	19.02 "
" A.E. Bridge	4.7 "	" "	51.67 "
" In poop l.	30.6 "	" "	19.02 "
" " " "	54.0 "	" "	119.13 "
" " " "	54.0 "	" "	59.42 "

less hatchways & part boiler casing Certificate of Competency No. **57.32** "

Name of Master: **III.**


Name, Residence, and Description of Managing Owner if there are more owners than one.

The Virgilia Steamship Company Limited
8, Gordon Street, Glasgow, C.1.
Sixty-four (64) shares.

Leonard Gow of same address, Manager.

Dated **10th October, 1927.**

(334798) Wt. 29391/15 Gp. 144 2000 3-24 W & S Ltd.

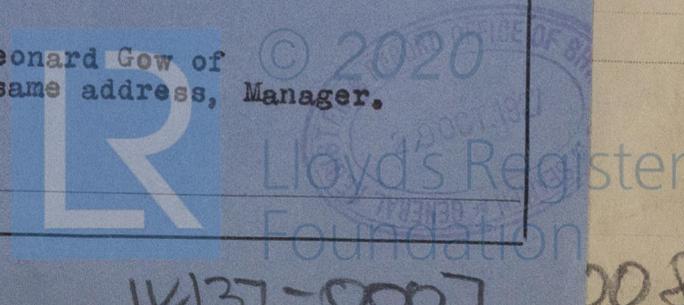

© 2020 Lloyd's Register Foundation

W/137-0007