

FREEBOARD OF STEAMSHIP.

FREEBOARD assigned to the s.s. No. 109,

~~Clyburn~~ Builders - Messrs. New Waterway Shipbuilding Co.

CENTRE OF DISC 3 ft. 9½ ins. below top of statutory deck line.

MAXIMUM LOAD-LINE in fresh water 6½ inches above the centre of the disc.

„ „ in Indian Seas in Summer 6 inches above the centre of the disc.


„ „ in Summer the centre of the disc.

„ „ in Winter 6 inches below the centre of the disc.

„ „ in Winter, North Atlantic _____ inches below the centre of the disc.

The same to be marked on the vessel's sides, inserted in the certificate of classification, and reported in the Register Book.

Subject to the particulars & dimensions being verified on completion, steel bulk heads being fitted between the upper & shelter deck at each end of tonnage opening with the usual closing appliances to openings in same, & efficient temporary covers being fitted over the tonnage opening in accordance with the rules for shelter deck steamers.

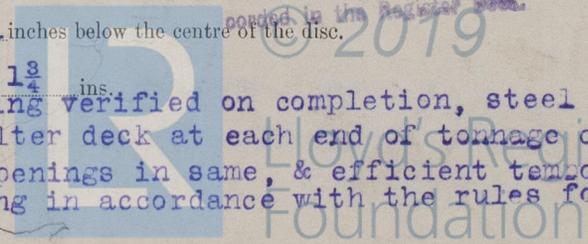

W143-0005