

Do. of Poop 13.48
 Do. of R.C. Dk. 103.27
 Do. of Bridge House 52.16
 Do. of Forecastle 12.62
 Do. of Houses on Deck 42.44

Transverse Number
 Length of deck from fore

Built at *Jarros-on-Tyne*
 When built 1920

MESSRS. PALMER'S NO. 895

S.S. "WAR BHARATA"

"Z" TYPE OF STANDARD SHIP


Equipment No. 35504. Equipment letter "z"

A letter has been received from Mr. G. L. Brown, stating that the collective weight of the three Bower Anchors is 3 qrs. deficient, and desiring to be informed whether the Anchors could therefore be approved by the Committee.

The weights of the Anchors and of the Stud Chain Cables required by the Rules, and as supplied to the vessel, are as set forth below:-

	<u>Rule</u>			<u>As supplied.</u>		
	Cwts.	qrs.	lbs.	Cwts.	qrs.	lbs.
1st Bower Anchor stockless.	63.	3.	0.	63.	3.	7
2nd " " "	63.	3.	0.	63.	0.	7
3rd " " "	54.	2.	0.	54.	1.	14
Collective weight of Bower Anchors.	182.	0.	0.	181.	1.	0
Stream Anchor stockless	17.	2.	0.	17.	3.	0.
Kedge " "	7.	2.	0.	7.	3.	6
	207.	0.	0.	206.	3.	6.
Stud Chain Cable	682.	1.	11.	685.	0.	5.

It will be observed from the above that whilst the weight of the Bower Anchors is 3 qrs. deficient, the total weight of all the Anchors is only 22 lbs deficient, and that

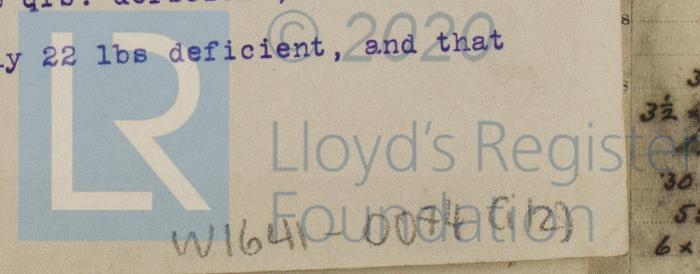

Ministry of
 London
 London
 or in Dry Dock
 No. of Deck
 No. of Ties
 Round Dk.
 Dk. Beams
 Inches Size in Ship
 Inches in Ship
 70 x 90
 70
 6 x 6
 70
 44-4
 35
 3 1/2 x 3 1/2
 30
 55 x
 6 x 6
 40 +
 35

