




SWAN, HUNTER, & WIGHAM RICHARDSON, LIMITED.  
Shipbuilders & Engineers,  
WALLSEND AND WALKER  
London Office: 21, Russell Square, W.C.1.

ALL OFFERS ARE SUBJECT TO OUR USUAL STRIKE, ACCIDENT  
AND GUARANTEE CLAUSES, AND TO THE OTHER CONDITIONS  
IN OUR PRINTED FORM OF CONTRACT.



Telephone Wallsend 63181.(5 Lines)

Telegraphic & cable address :-  
NEPTUNE, NEWCASTLE-ON-TYNE.

NEPTUNE WORKS,  
WALKER,  
NEWCASTLE-ON-TYNE.6.

Our Ref: 7TW/M.

25th January 1939.  
Wednesday.

Your Ref.

Messrs. The Surveyor's to Lloyd's Register,  
Collingwood Buildings,  
Collingwood Street,  
Newcastle-on-Tyne, 1.

Dear Sirs,

No.1606.


Referring to your letter of the 3rd inst., regarding  
drawings No.14064 - Arrangement of Boiler Mountings - and  
No.14086A - Arrangement of Circulating System between La Mont  
Boiler and cylindrical boilers, we have considered your comments  
and reply as follows:-

Arrangement of Boiler Mountings - The blow-down and  
scum valves on the oil fired boilers will be of the non-return  
type.

It has been decided to fit one water gauge glass and a set  
of test cocks instead of two gauge glasses, and the revised  
arrangement is shewn on the enclosed drawing No.14064A submitted  
for approval.

Waste Heat Boiler Circulating System - The circulating  
suction valves on the oil fired boilers have been increased to  
4" bore to reduce frictional losses in the pump suction system

W174-0116 (112)

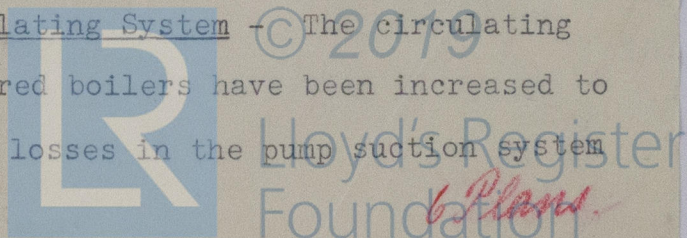



SWAN, HUNTER & WIGHAM RICHARDSON, LD.

Messrs. The Surveyors to Lloyd's Register.

25 - 1 - 1939.

and will be of the non-return type.


Double shut off valves will be arranged in the steam pipes between the La Mont Boiler and the oil fired boilers, as shewn on the enclosed drawing No.14086B.

With regard to stop valves on the La Mont waste heat boiler as mentioned in your letter, these do not appear to us to be necessary, and we shall be pleased if you will re-consider this point.

Yours faithfully,

~~for~~ SWAN, HUNTER, & WIGHAM RICHARDSON, Limited

(Signed) P.L. JONES.

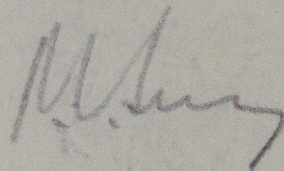

aw



© 2019

Lloyd's Register  
Foundation

W174-0116(2/2)