

(LLOYD'S REGISTER.)

G.R. 130.
Lloyd's Register.

VESSELS OF 100 TONS AND UPWARDS.

These particulars are supplied by the Registrar General of Shipping and Seamen for the sole use of Lloyd's Register of British and Foreign Shipping.
Signal Letters (if any) **L.B.D.V.**

Official Number. 160,369.	Name of Ship. Llanover.	No., Date, and Port of Registry. 50 in 1928 London.
-------------------------------------	-----------------------------------	---

No., Date, and Port of Previous Registry (if any).

Whether British or Foreign Built. British	Whether a Sailing or Steam Ship; and if a Steam Ship how propelled. Steam Ship Screw	Where Built. Sunderland	When Built. 1928	Name and Address of Builders. Bartram & Sons Limited Sunderland.
Number of Decks One	Length from fore part of stem, under the bowsprit, to the aft side of the head of the stern post 400	Feet.	Tenths.	
Number of Masts Two	Length at quarter of depth from top of weather deck at side amidships to bottom of keel 400		---	
Rigged Schooner	Main breadth to outside of plank 53		4	
Stern Elliptical	Depth in hold from tonnage deck to ceiling at midships 26		---	
Build Clincher	Depth in hold from upper deck to ceiling at midships, in the case of three decks and upwards ---		---	
Galleries None	Depth from top of beam amidships to top of keel 29		4.9	
Head None	Depth from top of deck at side amidships to bottom of keel 27		9.5	
Framework and description of vessel Steel Cargo	Round of beam 1		6.7	
Number of Bulkheads Seven	Length of engine room, if any 49		5.	
Number of water ballast tanks, and their capacity in tons Six-1141 Tons				

PARTICULARS OF DISPLACEMENT.

Total to quarter the depth from weather deck at side amidships to bottom of keel } **9730** Tons. | Ditto per inch immersion at same depth } **42.6** Tons.

PARTICULARS OF PROPELLING ENGINES, &c. (if any).

No. of sets of Engines.	Description of Engines.	Whether British or Foreign made.	When made.	Name and address of makers.	Reciprocating Engines.		Rotary Engines.	N. H. P. B.H.P. I. H. P. Speed of Ship.
					No. and Diameter of Cylinders in each set.	Length of Stroke.		
One	Tri-compound Direct Acting Surface Condensing Vertical	British	1928	Blair & Co., (1926)Ltd.,	Three 27"	48"	---	460
One	Cylindrical Multitubular	British	1928	Stockton-on-Tees.	44 1/2"	73"	---	2050
	Number Three							10 Knots
	Iron or Steel Steel							
	Loaded Pressure 180 lbs.							

PARTICULARS OF TONNAGE.


GROSS TONNAGE.		No. of Tons.	DEDUCTIONS ALLOWED.		No. of Tons.
Under Tonnage Deck		4574.65	On account of space required for propelling power		1587.01
Space or spaces between Decks... ..			On account of spaces occupied by Seamen or Apprentices, and appropriated to their use, and kept free from goods or stores of every kind, not being the personal property of the Crew		
Turret or Trunk			These spaces are the following, viz.:— Poop and four Deck Houses.		220.86
Forecastle			(Number of seamen or apprentices for whom accomodation is certified) 40		
Bridge space (Houses in)		30.61	Deductions under Section 79 of the Merchant Shipping Act, 1894, and Section 54 of the Merchant Shipping Act, 1906, as follows:—		
Poop on Deck		125.79	Master's Accommodation 21.93		
Side Houses			Boatswain's Stores 44.43		
Deck Houses			Wireless Room 4.23		
Chart House		166.47	Chart Space 7.31		
Spaces for machinery, and light, and air, under Section 78 (2) of the Merchant Shipping Act, 1894		61.90	Water Ballast Spaces 91.69		
Excess of Hatchways			Total		1977.46
Gross Tonnage		4959.42	Cubic Metres 14035.16		
Deductions, as per Contra		1977.46			
Register Tonnage		2981.96			

NOTE 1.—The tonnage of the engine room spaces below the Upper Deck is **682.75** tons, and the tonnage of the total spaces framed in above the Upper Deck for propelling machinery and for light and air is **136.85** tons.

NOTE 2.—The undermentioned spaces above the Upper Deck are not included in the cubical contents forming the ship's register tonnage.

Forecastle & Bridge combined L. 317.3' - 901.10 Tons
Open passages on Bridge abreast casings L. 38.3' X 2 No. 23.60"

Name of Master	Certificate of { Service No. Competency No. 1042
No. of Owners	
Name, Residence, and Description of Managing Owner if there are more owners than one.	
Anne Thomas Steamship Company Limited Baltic House, Cardiff. Shares. Sixty-four.	
Dated 22nd February, 1928.	

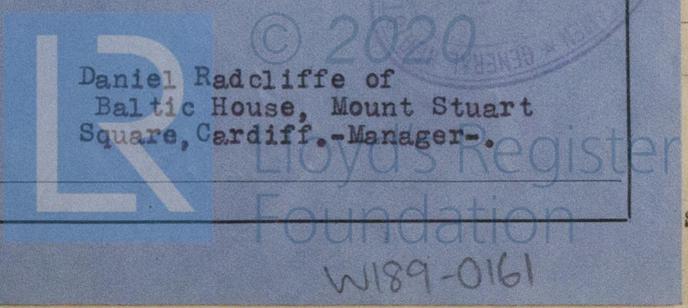

Assigned see ...