


66368.

2 MAR 1939

PUMP CAPACITIES.  
GEN. SERVICE PUMPS (2 OFF) EACH, 75 TONS/HR. AT 100 LBS/6" W.P.  
BALLAST PUMP (1 OFF) 250 TONS/HR AT 50 LBS/6" W.P.  
EMERG<sup>Y</sup> BILGE PUMP (1 OFF) { 120 TONS/HR AGAINST 60' 0" HEAD  
50 TONS/HR. AGAINST 150' 0" HEAD.  
EMERG<sup>Y</sup> BILGE PUMP ARRANGED TO TAKE CURRENT DIRECT FROM EMERG<sup>Y</sup> GENERATOR ON BOAT DECK. ALL AS PER EXISTING ARRANG<sup>T</sup>.

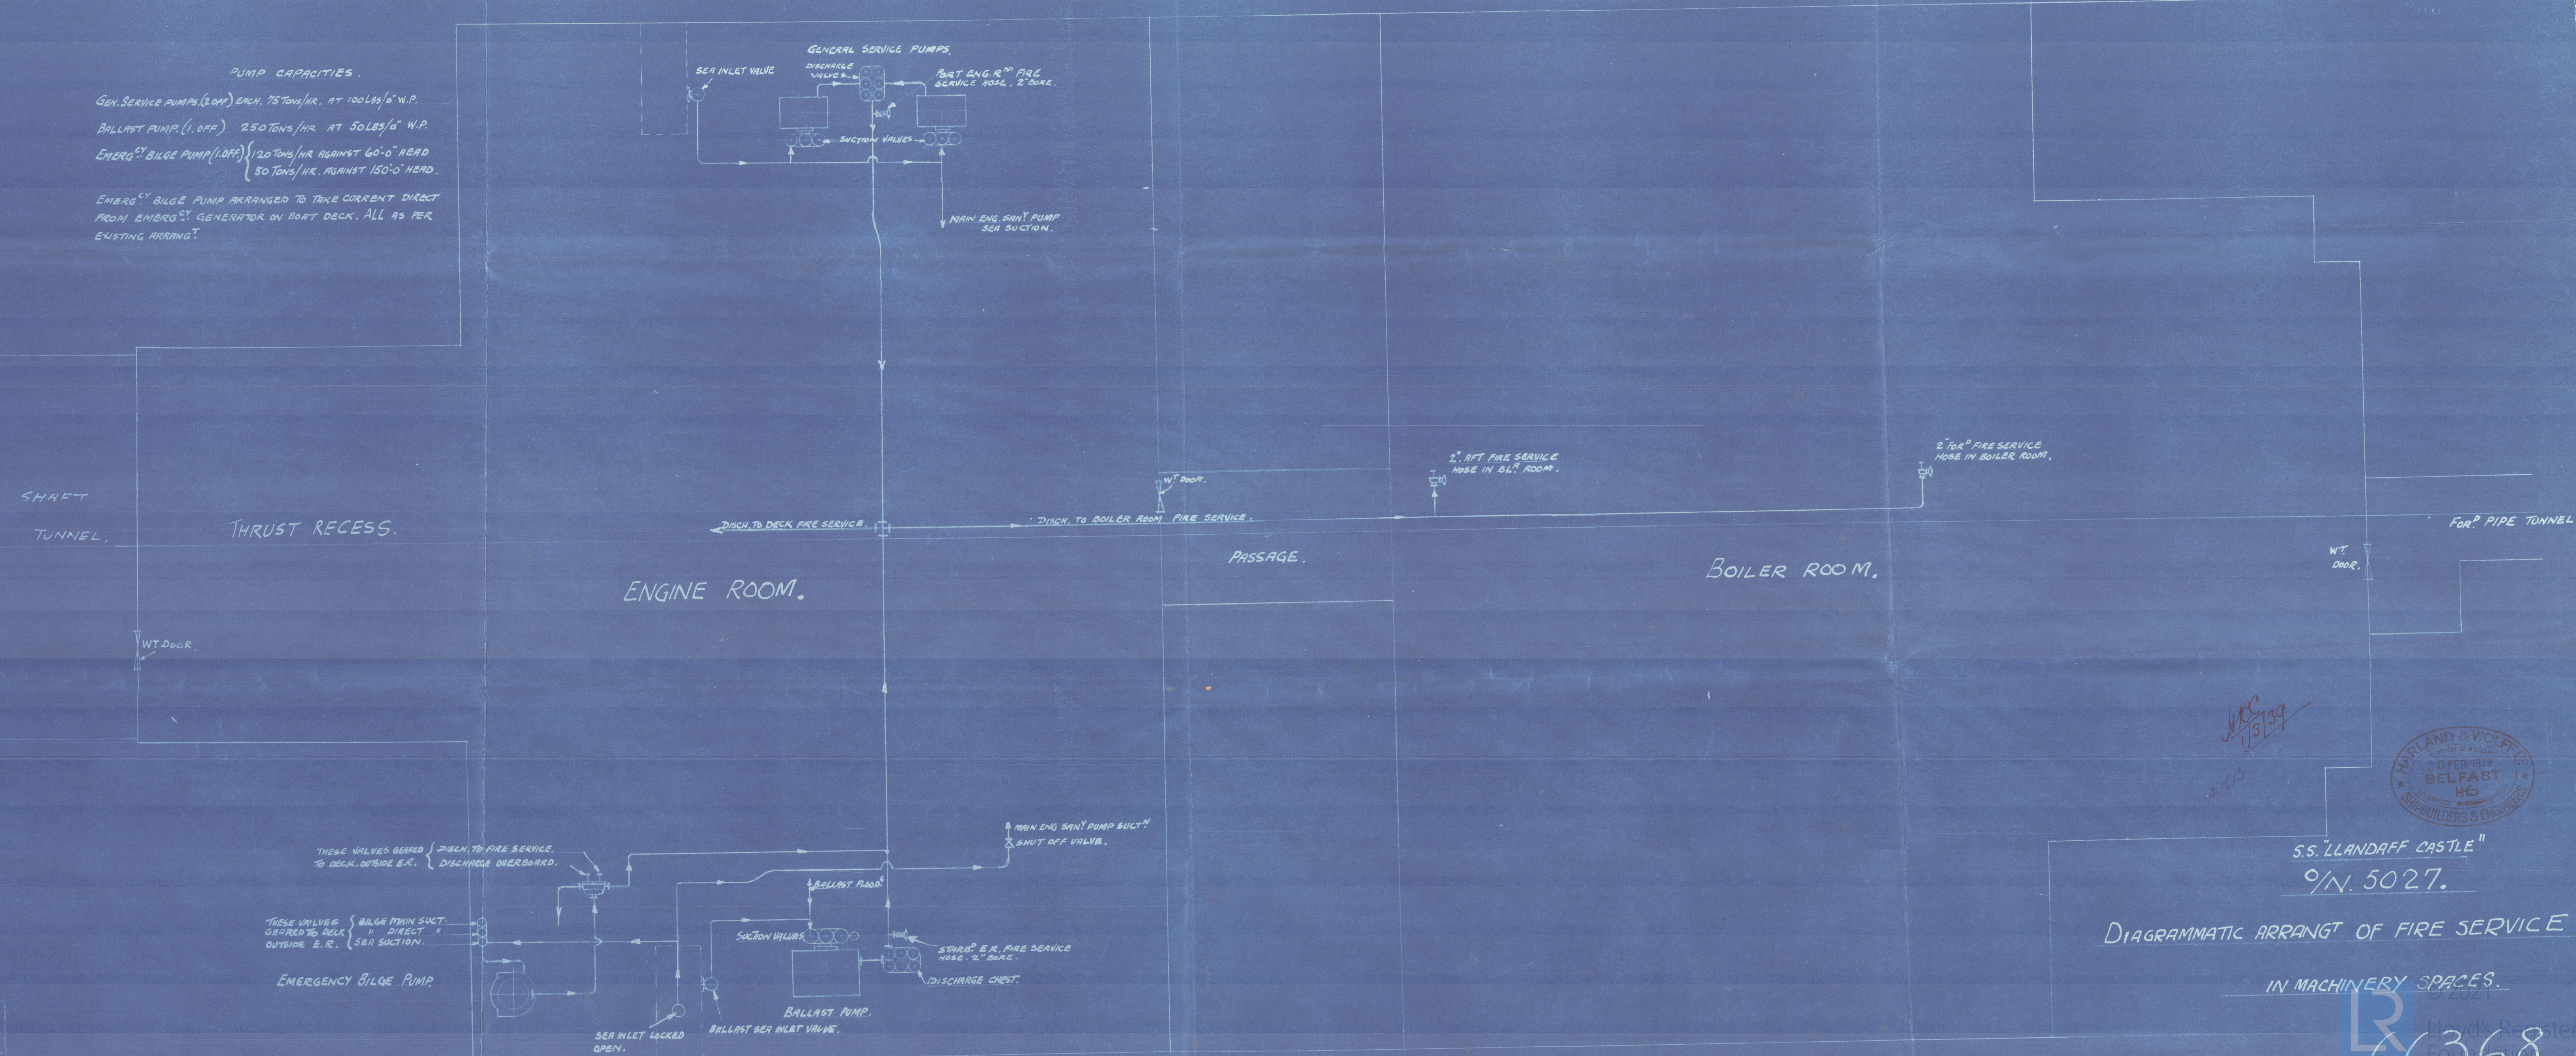

HARLAND & WOLFF LTD  
BELFAST  
DRAWN BY: *gibb*  
CHECKED BY: *RL*  
DATE: 18.2.39.

*MCC*  
*13/39*  
*9-1315*

HARLAND & WOLFF LTD  
LONDON GLASGOW  
2 FEB 1939  
BELFAST  
HB  
SHIPBUILDERS & ENGINEERS

S.S. "LLANDAFF CASTLE"  
9/N. 5027.

DIAGRAMMATIC ARRANG<sup>T</sup> OF FIRE SERVICE.

IN MACHINERY SPACES.

66368.  
WJ3-0079



HARLAND & WOLFF LTD.  
BELFAST

No. Llandaff Castle 5027

TITLE Fire Service

DATE APPROVED 2.3.39

"Llandaff Castle"

Belfast Rpt 12394

V193-0079



© 2021

Lloyd's Register  
Foundation