


s. s. "SEROOSKERK" and "ZUIDERKERK".

---

IT IS SUBMITTED the Surveyors be informed that with double reduction geared steam turbines for open sea service and having a total maximum designed shaft horse power of 5000 at 95 revolutions per minute of the propeller, diameter of propeller 18'3" and screwshaft with continuous liner, the existing sizes of shafting, viz:- intermediate 15", thrust 15 $\frac{3}{4}$ " and screwshaft 16 $\frac{1}{2}$ " diameter meet the requirements of the Rules.

L188/33

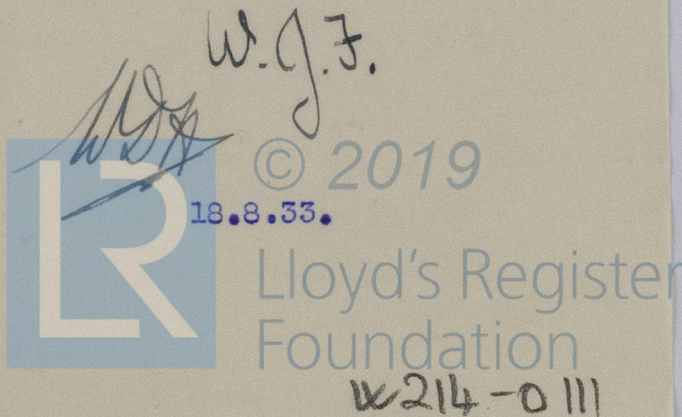

© 2019  
18.8.33.

Lloyd's Register  
Foundation

W214-0111