

AIR RECEIVER Endorsement.

Shipbuilders: Messrs. Chantiers et Ateliers de St Nazaire Trawler for
No. Mr. Hurel

Makers: Messrs. "

Air Receiver No.

For: Messrs.

It is submitted that the plan of riveted
air receiver merits approval for a working pressure of 25 kgs
per sq. cm., provided the air receiver be constructed under


the usual conditions of survey and testing.

+ the thickness of the dished end plates be not less than 29 mm.
It is concluded that the radii of the dished ends are as
now indicated on the plan.

It should be pointed out that the manhole on the shell
Return plan! should have its shorter axis arranged longitudinally
Retain copy!

E. 3. 5c, 9, 30. T.

L 215786

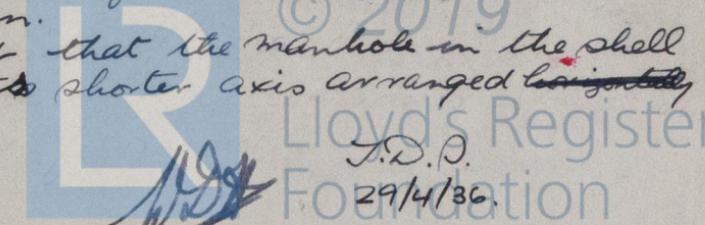

J.D.O.

29/4/36

W243-0155