

The Scottish Tube Co. Ltd.,  
Govan Tube Works,  
Helen Street,  
GOVAN.

Tested. Date... *19th May* 1919.

S P E C I F I C A T I O N of Lapwelded Wrot. Iron Main Steam Pipes

For *Caird & Co. Ltd. Greenock.*

Order No. *12/8/18*

Contract No. *416*

6 - Bent Pipes made from  $5\frac{1}{2}$ " O.D. x  $5/16$ " thick Tube, screwed at ends with vanishing threads and fitted with Flanges to diameters and thicknesses as specified, screwed on, faced plain, turned on edge and having tube ends expanded into Flanges.

Working Pressure


180 Lbs. per Square inch.

Test Pressure

540 Lbs. per Square inch.

All to LLOYD's Requirements.

*Messrs The Surveyors  
Greenock.*

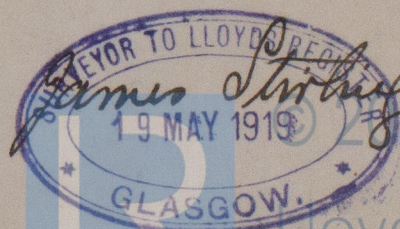

Lloyd's Register  
Foundation

W26-0110