

COPY



## LLOYD'S REGISTER OF SHIPPING

MEIKAI BUILDING

No. 32, AKASHI MACHI,

KOBE, 21st April, 1938.-

TELEGRAMS: "REGISTER" KOBE

TELEPHONE: 2530 SANNOMIYA

The Surveyors,  
H O N G K O N G

H'Kong & W'poa Dock Co's  
Yard No.804. Eng.Nos.522-3.  
Stern tube, screw & intermediate shafts.

Dear Sirs,

In reply to your letter of the 12th inst. submitting for approval the above plan in quadruplicate, I have to inform you that with 2 S.C.S.A. heavy oil engines for main propelling purposes having 6 cylinders, 350 m/m diameter by 620 m/m stroke, cranks arranged so that no two cylinders fire simultaneously, maximum pressure in the cylinders 500 to 700 lb. per sq. inch, propeller 7'-6" diameter & developing 1210 brake horse power at 280 R.P.M. or, alternatively, 1020 brake horse power at 230 R.P.M., the proposed sizes of shafting, viz:-

Intermediate 6-3/4" diameter  
Combined screw and tube shaft, 8" diameter,

will be approved provided the steel be made at approved Works and the forgings be made and tested as required by the Rules.

The plan will also be approved provided the arrangements and details be as shewn and amended thereon and the work be carried out to your entire satisfaction.

© 2019  
Lloyd's Register  
Foundation  
W266-0080(112)


- 2 -

Two copies of the approved plan are being returned  
to you under separate cover.

I am, Dear Sirs,

Yours faithfully,

SURVEYOR TO LLOYD'S REGISTER.

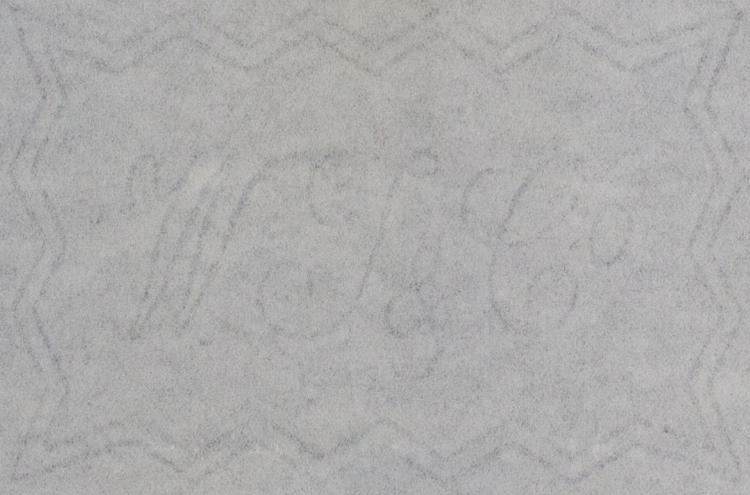

© 2019

Lloyd's Register  
Foundation

W266-0080 (212)