

N 225

# Freeboard Particulars

From :- Length B.T. 380'0" Breadth Mld. 51'8½"  
Mld. Main dk 27'8" Bridge deck 35'8"  
Main deck 51'4" Coeff say .79

Lead Tanks  
Frames 12"  
Sparring/strut  
No Ceiling  
Or Under 41"

Poop 60'6" x 8'0" high  
Bridge 227'3" x 8'0" "  
Forecastle 29'3" x 8'0" " +2'2" overhang.

Impost 4'5"	} ¼ + from ford	2'1"	
aft 2'4½"		1/8 + - -	4'5"
- 1'0½"		Abreast Stem	8'0"

no drop in sheer

Hatches in wells 3'0" at side, 6" rise in centre.

under Erections 12 inches side & centre.

Deck hatches 2'7" at side 6" rise in centre.

Front One opening 4'6" wide, 18" coamings  
els & shifting boards to full height.


Front Two hinged WT doors 2'6" wide.  
eners 8½ x 3 x 50 B.A. spaced 30" apart.

End Two openings 4'0" wide, 18" coamings  
els & shifting boards to full height.

out Two openings 3'6" wide, 18" coamings  
els & shifting boards to full height.

Deck of steel

under Hatches & over bilges only.  
1.08 feet.

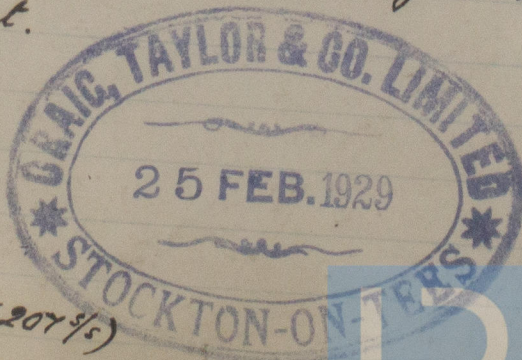

Sister

Portcurno (207½)

in 1923-4

© 2019

Lloyd's Register  
Foundation

W498-0183



