

Do. of Houses
Do. of excess of

Steel Screw Motor Lighter "HEBE", Yard No. 24, building by
the Dordrecht Shipbuilding Co.

Rule Dimensions: 180 x 30 x 13


Mr. Zulver, representing the Owners of this vessel,
Messrs. The Anglo-Saxon Petroleum Co., called at this Office
and stated that they desire to fit a forecastle to the vessel.

It was ^{found} that this addition would affect the equipment
and the Surveyors were communicated with, and it was found
that the equipment for the vessel was already supplied.

New Equipment No. 8230.

<u>Equipment now required by Rule.</u>	<u>Equipment as supplied to vessel.</u>
Lower anchor 16cwt. 3qr. 0 lb	14cwt. 2qr. 6 lbs.
" " 16cwt. 3qr. 0 lb	14cwt. 0qr. 2 lbs.
" " 14cwt. 2qr. 0 lb	13cwt. 1qr. 0 lbs.
Collective wt. of lower anchors 48cwt. 0qr. 0 lb	41cwt. 3qr. 8 lbs.
Anchor 4cwt. 3qr. 0 lb ex stock	4cwt. 1qr. 1 lb. ex stock
Anchor 2cwt. 1qr. 0 lb " "	1cwt. 3qr. 24 lbs. "
Collective weight of anchors.....55cwt.48cwt. 0qr. 5 lbs.
Main cable 210 fms. of 1-4/16", 168 cwt.	195fms. of 1-3/16", weight 141cwt. 0qr. 16 lbs.
Cable 60fms. of 3" steel wire	60 fms. of 3" steel wire
75fms. of 2 3/4" steel wire	75 fms. of 2 3/4" steel wire
90fms. of 6" manila	90 fms. of 6" manila
fms. of 4" manila	

It is submitted that provided the 3rd bower anchor
be dispensed with and a new stockless anchor 20cwt. 1qr. 0 lbs
be supplied, making the collective weight of the anchors
55cwt. 0qr. 5 lbs., being equivalent to the Rule requirements;
an additional 45 fms. of ^{1 3/16"} stud chain cable be supplied, making

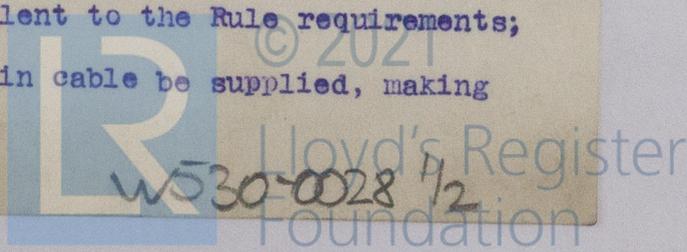

BEAMS, I

Do. of
Do. of
Do. of

the weight of the cable 173cwt. 2qr. 21 lbs., being slightly in excess of the Rule requirements; and 90 fms. of 4" warp be supplied, the vessel will merit the favourable consideration of the Committee for the notation Figure 1.

The matter of the equipment has been discussed in this Office with Mr. Zulver, the Owners' representative, who is agreeable to the above proposals, subject to the Committee's approval.

Lr: 15/4/16.
Amnd: 28
p.c. to Mr. Zulver.

C.F.
28.4.16

CCP
ctm

FRI. APR. 28. 1916

Proposal app?
W



© 2021

Lloyd's Register

W530-00287/2