

Amadale Castle Report No. 21318

Steel screw steamer No. 424 building by Messrs. The Fairfield S.B. & E. Co., Lim., at Glasgow, for the Union-Castle S.S. Co., with a view to class 100A1.

Rule dimensions ; 567.92 x 64.26 x 43.85

The bower anchors required by Table 22 are as follows:-


1st Bower	117½ cwts. stockless	
2nd "	117½ " "	
3rd "	100 " "	
Collective weight	335 "	
With Stream anchor	36 ex stock.	Kedge anchor 19 cwts.
Stock	9	Stock 4. 3. 0
	45 cwts.	23. 3. 0

At the desire of the Owners the following equipment was approved by the Committee instead of the three bowers required by the Rules, viz:-

1st Bower		117½ Stockless
2nd "		117½ "
3rd "	72 cwt. (Rodgers) ex stock =	90 including stock
4th "	" " " " =	90 " "
Collective weight		415

The anchors are supplied as follows:-

1st Bower	117. 2. 21 Stockless.
2nd "	117. 0. 10 "
3rd anchor	71. 2. 22
stock	18. 1. 11 = 90. 0. 5 including stock.
4th anchor	71. 2. 0
stock	18. 0. 13 = 89. 2. 13 " "
Collective weight	414. 1. 21
with Stream anchor	36. 3. 0 and Kedge 19. 1. 21
stock	9. 0. 22 stock 4. 2. 15
	45. 3. 22 24. 0. 8

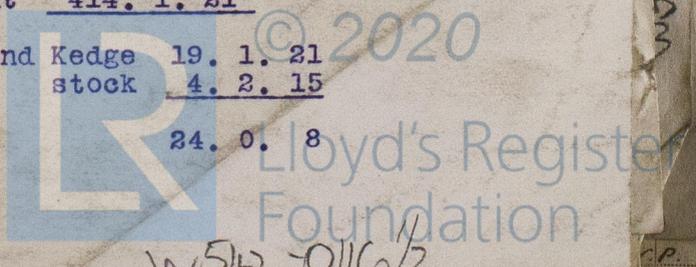

W542-0116/2

W542-012

