

W 542-0120 1/2

7

Proposed equipment of anchors for The Fairfield S.B. & E. Co's  
Twin Screw Steamer No. 424.

This vessel is building for The Union-Castle S.S. Co. under  
special survey for the 100A1 class.

Rule dimensions ; 567.92 x 64.26 x 43.85

Equipment number ; 97234.

The bower anchors required by Table 22 are as follows:-

1st Bower anchor	117½ cwts. Stockless.
2nd " "	117½ " "
3rd " "	<u>100</u> " "
Collective weight	335 cwts.


A letter was recently received from the Builders stating that  
the Owners desired that two instead of three bower anchors should  
be supplied, as follows:-

1st Bower anchor	152½ cwts. Stockless.
2nd " "	<u>152½</u> " "
Collective weight	305 cwts.

Inquiry having been made as to the reason for this proposal, an  
amended application has been received from which it appears that  
the Owners <sup>now</sup> desire to supply four bower anchors as follows:-

1st Bower anchor	Cwts.	117½ Stockless.
2nd " "		117½ "
3rd " "	72 cwt. (Rodgers) ex stock	= 90 including stock
4th " "	72 cwt. do. do.	= 90 do do
Collective weight	415	

as compared with 335 cwts. as required by Table 22.

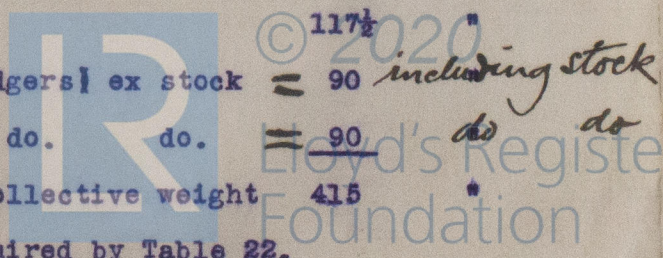

W 542-0121



That is to say, two anchors of 90 cwts. each (including stock) are proposed to be substituted, as 3rd and 4th bowers, for one stockless anchor of 100 cwts. <sup>the</sup> 3rd bower as required by Table 22.

It is submitted that as this application is made at the request of the Owners the same is worthy of the favourable consideration of the Committee.

*J.H.L.*  
*28/8/02*

*Submitted 28<sup>th</sup> Aug. 1902*  
*Submission approved*

*76.8.02*

*28<sup>th</sup>*



© 2020

Lloyd's Register  
Foundation

*w542-0120/2*

*w542-0121*