

Under Upper Dk. (Steel) 6261.20

Depth, at middle of length from top of keel to top of beams at side of uppermost Continuous Deck 38.04

Year of Appointment

V. MON

W699-0037

F.E.

Received by Chief Ship Surveyor

Received from Chief Ship Surveyor

VESSEL'S NAME Steel S.S. "MONTE PASUBIO" Rpt. Nbr No. 19836

The remarks of the Chief Ship Surveyor are desired on this case for the consideration of the Classing Committee.

("The endorsement to contain a succinct summary of any repairs that have been required and to show the cause or causes of such repairs, and also to bring out clearly any exceptional features in connection with the case, so that the Classing Committee may have all the salient points presented in the endorsement." - Extract from Sub-Committee's Report, 24/5/92.)

Transverse No. 85.5 Depth "d" 25.1

Framing: Table No. - Description Frames & Reversed Frames

Longitudinal No. 35183

Proportions Length = 10.8 Depth =

Deck Sheerstrake as approved.

Vessel built with straight frames & bevelled bilge.

The Downton Pump has been dispensed with for the present but it is included the Owners are agreeable to fit same when requested.

The Collective weight of the Bower Anchors is 193-1-1" instead of 194-2-0" as required but it is submitted the Anchors might be accepted.

In other respects

This vessel appears to have been built in accordance with the Rules and the approved plans, and it is submitted she is eligible to be classed as 100 A.1 (steel) Shelter Deck with freeboard, as recommended. The Summer freeboard of 10'-1" from centre of disc to top of statutory deck line at Shelter deck, now marked on the vessel's sides, to be inserted in the classification certificate, and recorded in the Register Book, and further, the remaining freeboards, as shown on the accompanying verification form to be inserted in the certificate of classification.

1 Dk (steel) & Shelter Dk (steel). Cell DB 339' 1571t DTA 23' 858t FPT 91t APT 126t

EK. 6 BH to Shelter Dk. 2 BH to Upper Dk. pt. cam. Lloyds AYCP.

F41 on Shelter Dk.

The Certificate of Classification, to be endorsed "Cargo battens not fitted," and the same notation to be printed in the Register Book.

See also freeboard to be posted as assigned name has change

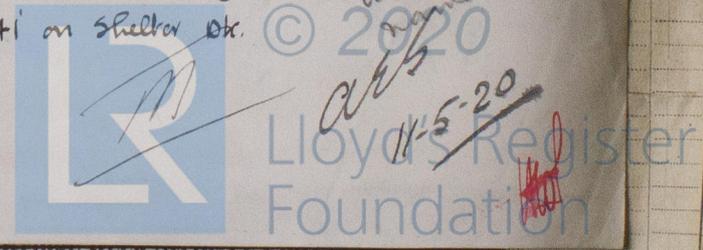


Table with columns for various ship components and their status (checked/unchecked). Includes items like 'Tee Bulb or Channel', 'Angles on upper edge', 'Spacing', 'Forecastle Deck, Angle, Bulb Angle', 'Deck Material and thickness', 'Forecastle Deck Stringer Plate'.