

S/S. "PORT LYTTTELTON"

SPECIFICATION for TEMPORARY DAMAGE REPAIRS.

You are invited to tender for the following temporary repairs and tender for this, stating number of running days, the repairs will be completed are to be handed in at the office of the BORNEO COMPANY Ltd., Kampoeng Malakka 9, BATAVIA not later than 4 o'clock in the afternoon of the 25th of AUGUST 1924.

The owners do not bind themselves to accept the lowest or any tender.


Repairs to be effected to satisfaction of Classification, Underwriters and Owners' Representatives.

All holes in bottom to be made tight by bolted patches and covered inside double bottom by a layer of cement, \pm 4 inches thick. For accessibility holes may be out in the tank top of No.1 double bottom tank, two of these holes being arranged for permanent manholes with screwed bolts from the inside and plate covers as existing manhole doors.

On completion of repairs, tanks to be tested by a head of \pm 18 inches of water and to be reasonably tight.

Vessels bottom to be cleaned.

DRYDOCKING: Contractor is to be responsible for all drydocking, shoring, dock rent and all other costs in connection with same.

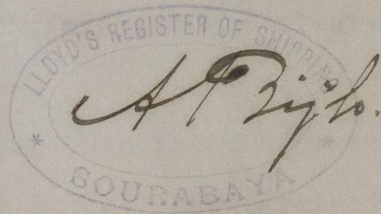

© 2021

Lloyd's Register
Foundation