

Sailing Barge "HETTY" building by Messrs A.Y.Otto at Kimpen a/d Ysel.  
 Equipment No.2935, letter "b".

The Amsterdam Surveyors state that by mistake the Builders ordered two stockless anchors for this Sailing Barge, as follows, viz:-

	cwts.	qrs.	lbs.
1st bower anchor, weight	4.	3.	0.
2nd " " "	4.	2.	21.

The Rules do not provide for stockless anchors being supplied to Sailing Vessels, and the anchors ex stock required by Table 22 are as follows:-

	cwts.	qrs.	lbs.
1st bower anchor, weight (ex stock)	4.	1.	0.
2nd " " " "	4.	1.	0.

If stockless anchors be allowed for this Sailing Barge the weights required by Table 22 would be as follows:-


	cwts.	qrs.	lbs.
1st bower anchor, weight	5.	1.	7.
2nd " " "	5.	1.	7.

and it will be observed that the anchors are 2 qrs. 7 lbs., and 2 qrs. 14 lbs., respectively less in weight than would be required if stockless anchors were allowed to be supplied.

It is submitted the anchors in question do not merit approval for the figure 1, and the Surveyors should be informed accordingly.

The test certificates, two in number, should be returned to the Surveyors.

J.H.T.  
25/6/03.

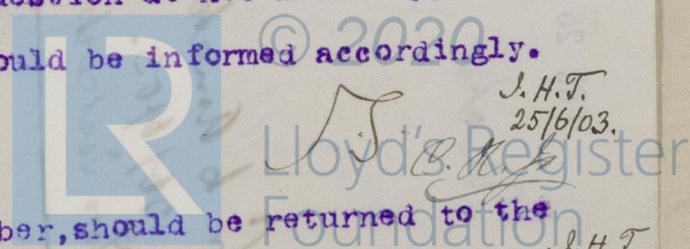

FRI. 26 JUN 1903

Not approved.

W

Dr: to Amsterdam  
26/6/03.  
(Two Test certificates)



© 2020

Lloyd's Register  
Foundation

Lloyd's Register