

COPY

9th May, 1914.

S.S. "HAWLEY"

RECOMMENDED BALLAST CONDITION WITH DRAUGHTS APPROXIMATELY
18 ft. FORWARD AND 22 ft. AFT.

Fore peak and fore deep:- empty.


Forward cofferdam, cargo tanks No. 1 p. and s., 2 p. c. and s., 4 p. and c:- open to sea and atmosphere, i.e. tank lids closed down airtight, but ullage plugs open.

No. 3 tank p. c. and s. open to sea but closed to atmosphere, i.e. tank lids closed down airtight, and ullage plugs closed.

Wing tanks, No. 4s. and 5, 6, 7, 8 and 9 p. and s:- ballast to sea level.

No. 5 c. tank may be filled to sea level, and balance placed in

No. 6 c. tank to give draughts 18 ft. forward and 22 ft. aft.

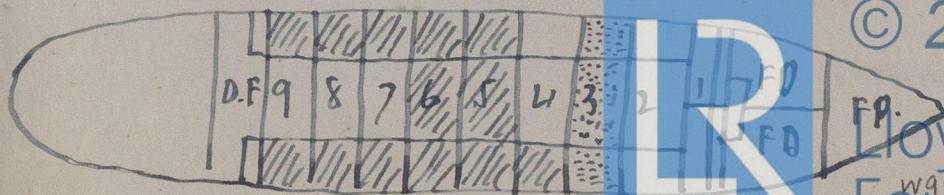

© 2020

Lloyd's Register
 Foundation